


BEST PRACTICE

for Building and Working
Safely on Ice Covers in Alberta

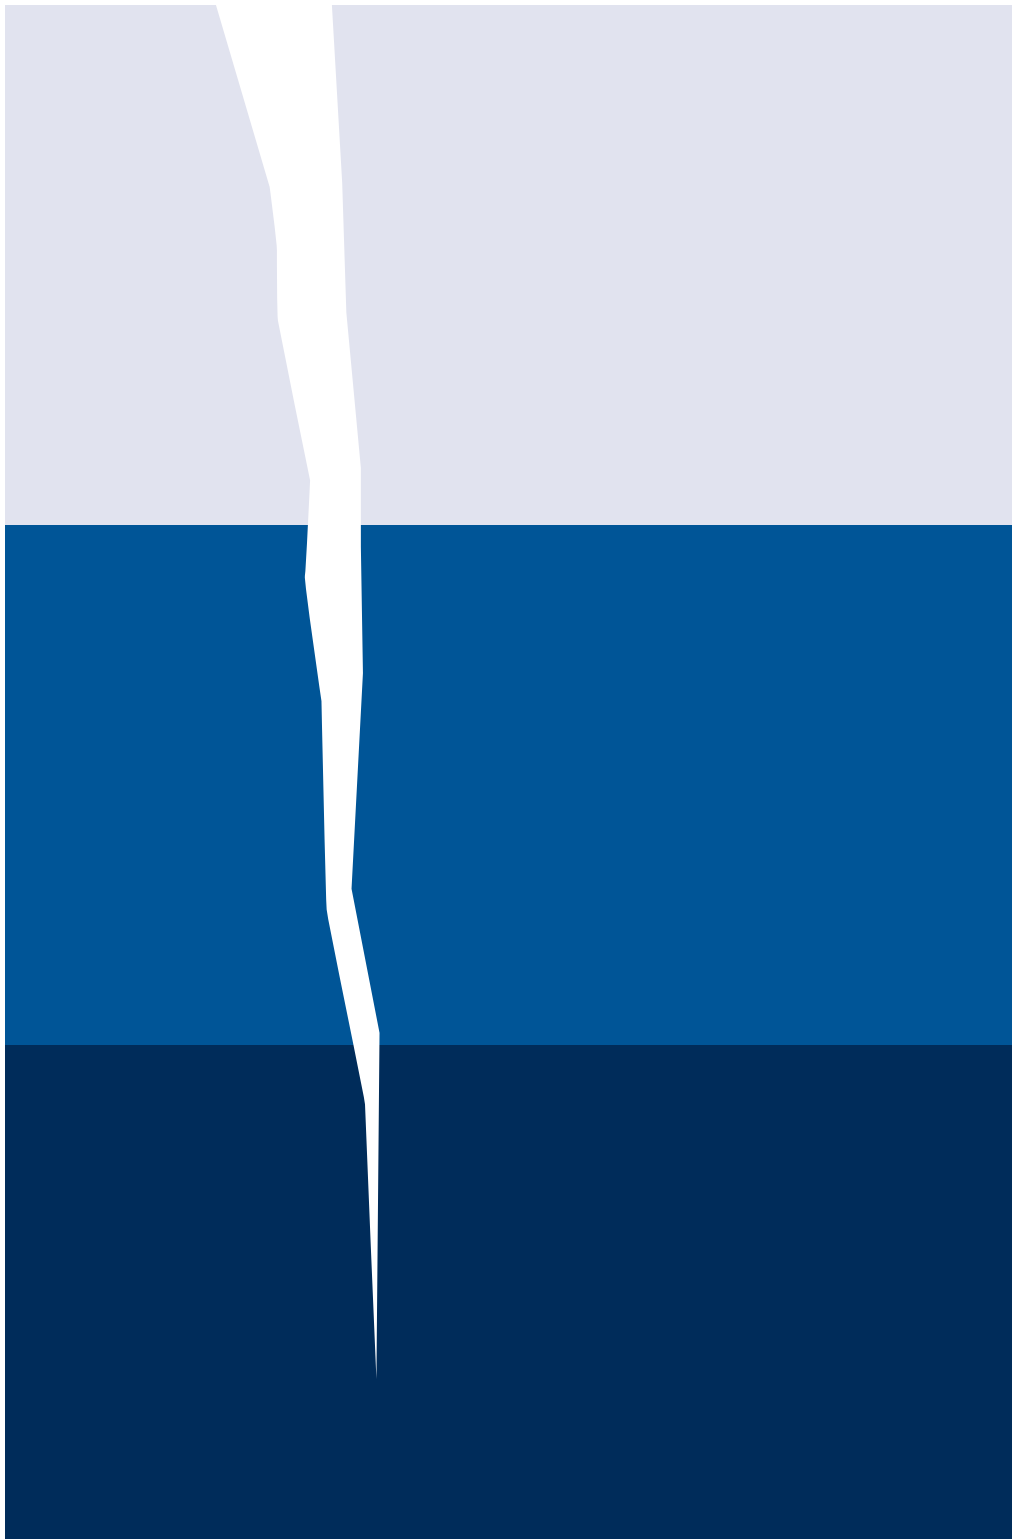

**Government
of Alberta** 

Work Safe Alberta 

DISCLAIMER

This material may be used, reproduced, stored or transmitted for non-commercial purposes. The source of this material must be acknowledged when publishing or issuing it to others. This material is not to be used, reproduced, stored or transmitted for commercial purposes without written permission from the Government of Alberta. This material is to be used for information purposes only; no warranty, express or implied, is given as to the accuracy or the timeliness of the material presented. In case of any inconsistency between this document and the Occupational Health and Safety Act, Regulation or Code, the legislation will always prevail.

Published October 2009
Publication Number SH010

ISBN 978-0-7785-8738-5

© 2009 Government of Alberta

All enquiries regarding this Best Practice should be addressed to:

Occupational Health and Safety Contact Centre
Edmonton and area: 780-415-8690
Throughout Alberta: 1-866-415-8690
Deaf or hearing impaired: 1-800-232-7215

Website: www.worksafely.org

**Government
of Alberta** ■

Work Safe Alberta 

DEDICATION

This document is dedicated to Karl Malmquist, who broke through the ice and drowned while operating a snowcat on the Peace River on January 7, 2005. It is also dedicated to the nearly 500 people in Canada who have lost their lives over the past 10 years while crossing or working on floating ice.

Over the period of 1991 to 2000, there were 447 deaths associated with activities on ice. Of these, 246 involved snowmobiles, 150 involved non-motorized activity and 51 motorized vehicles. Most of the deaths associated with activities on ice were related to recreational activities. (Canadian Red Cross Society 2006)

ACKNOWLEDGEMENTS

This Best Practice was created under the auspices of a multi-stakeholder advisory committee that drew on its experience in safety, engineering, construction and maintenance for work on ice covers.

The advisory committee included the following representatives from energy, utilities, construction, forestry and provincial and municipal governments:

Rory Ryder, Co-Chair, ATCO Electric

Ray Cislo, Co-Chair, Alberta Employment and Immigration

Sam Proskin, EBA Engineering Consultants Ltd.

Fred Baehl, Regional Municipality of Wood Buffalo

Emil Girard, Girard Enterprises

Ward Flaherty, Alberta Pacific Forest Industries

Don Hayley, EBA Engineering Consultants Ltd.

Barry Lozinsky, City of Edmonton (Parks)

Kelly McManus, LaPrairie Group Contractors Alberta Ltd.

Adele Tait, Alberta Employment and Immigration

Randall Warren, Shell Canada Energy

The committee acknowledges Don Hayley and Sam Proskin, who prepared the initial draft of the Best Practice and provided engineering input during the committee's revisions. The committee also appreciates the valuable lessons shared by Don and Sam from working with the Tibbitt to Contwoyto Winter Road Joint Venture and Nuna Winter Road Services. Through this collaboration, a series of ice road risk management practices have been developed and a number adapted for use in the Best Practice.

TABLE OF CONTENTS

ACKNOWLEDGEMENTS		iii
GLOSSARY		vi
1	INTRODUCTION	1
1.1	Background	1
1.2	Purpose and Scope	1
1.3	Limitations	3
1.4	How to Use This Best Practice	3
1.4.1	Use the Best Practice as a Planning Tool	3
1.4.2	Attach the Best Practice to Contracts	3
1.4.3	Develop Standard Operating Procedures	4
1.4.4	Use the Best Practice for Hazard Awareness Training	4
1.4.5	Use the Best Practice to Reduce Recreational Risk	4
2	ICE COVER HAZARDS AND FACTORS TO CONSIDER	5
2.1	Background	5
2.2	Ice Cover Type	6
2.3	Types of Ice Cover Cracks	9
2.4	Types of Loads	14
2.5	Load Duration	15
2.6	Schedule and Operating Window	15
2.7	Contractor Capability	16
2.8	Route and Site Conditions	16
2.8.1	Previous Local Experience	17
2.8.2	Local Climate	17
2.8.3	Route Selection Over Lakes, Ponds and Muskeg Terrain	18
2.8.4	River and Stream Covers	20
3	ICE COVER HAZARD CONTROLS	21
4	ICE COVER DESIGN, MONITORING AND MAINTENANCE	24
4.1	Design Controls	24
4.1.1	Gold’s Formula	24
4.1.2	Effective Ice Thickness	27
4.1.3	Recommended Short-Term Working Loads on Ice Covers	27
4.1.4	Effect of Sudden and Extreme Temperature Changes	29
4.1.5	Stationary Loads	30

TABLE OF CONTENTS

4.1.6	Lane Dimensions	31
4.1.7	Dynamic Effects of Vehicle Speed on Ice Covers	33
4.2	Ice Monitoring Controls	34
4.2.1	Measuring and Recording Ice Thickness	34
4.2.2	Monitoring Ice Cracks	37
4.3	Maintenance Controls	38
5	DEVELOPING YOUR ICE SAFETY PLAN	39
5.1	Ice Safety Plan	39
5.2	Standard Operating Procedures for Ice Covers	40
5.2.1	Approved Use of Ice Covers	40
5.2.2	Verifying Vehicle and Equipment Weights	40
5.2.3	Stationary Loads on Ice Covers	41
5.2.4	Minimum Distances Between Vehicles and Equipment	41
5.2.5	Maximum Speed When Travelling on Ice Cover	41
5.3	Ice Cover Closure	42
5.4	Emergency Response Planning	43
5.5	Emergency Procedures	43
6	PERSONAL PROTECTION EQUIPMENT	44
7	REFERENCES	45
7.1	Government References	45
7.2	Technical References	45
7.3	Miscellaneous References	46
7.4	Photo Credits	46
	APPENDICES	47
Appendix A	Using an Auger to Measure Ice Thickness While on Foot	47
Appendix B	Guide for GPR Ice Profiling	50
Appendix C	Safety Equipment for Ice Safety Plan	52
Appendix D	Emergency Procedures	53
Appendix E	Planning for Ice Covers	57

TABLES AND FIGURES LIST

TABLES

Table 1: Ice Types and Their Variability	8
Table 2: Load Duration	15
Table 3: Allowable Loads in Kgs For A-Values And Effective Ice Thickness	25
Table 4: A-Values and Hazard Controls	26
Table 5: Minimum Ice Thickness for Lighter Loads	28
Table 6: Minimum Ice Thickness for Stationary Loads up to 5,000 Kg	30
Table 7: Recommended Minimum Road Dimensions	32
Table 8: Suggested Maximum Speed Limits	42
Table A1: Recommended Maximum Spacing of Auger Test Holes	48
Table A2: Recommended Minimum Frequency Of Auger Test Holes	48
Table A3: Ice Cover Profile Template	49
Table E1: Ice Cover Inspection Template	58

FIGURES

Figure 1	Clear blue lake ice	6	Figure 25	Breakthrough beneath a snowbank	32
Figure 2	Clear blue river ice	6	Figure 26	40-metre lane with low snowbanks	32
Figure 3	White (snow) ice	7	Figure 27	Dynamic waves	33
Figure 4	Frazil ice(slush ice)	7	Figure 28	Ice measurement with an auger	34
Figure 5	Jam ice	7	Figure 29	GPR ice profiling equipment	34
Figure 6	Radial and circumferential cracks	9	Figure 30	Pine trees as markers	34
Figure 7	Breakthrough on circumferential crack	10	Figure 31	Assessing ice cracks	37
Figure 8	Normal longitudinal cracking	10	Figure 32	Flooding crew repairing an ice road	38
Figure 9	Longitudinal cracks – block popping out	11	Figure 33	Develop an Ice Safety Plan	39
Figure 10	Wet cracks	11	Figure 34	Barricade markers	40
Figure 11	Pressure ridge	12	Figure 35	Portable vehicle scale	40
Figure 12	Hinge crack	13	Figure 36	Sign that limits travel on the ice	41
Figure 13	Blowout from speeding vehicles	13	Figure 37	Road closure sign	42
Figure 14	Recommended minimum ice thickness	14	Figure 38	Emergency rescue drill	43
Figure 15	Fort McMurray Air Freezing Index	18	Figure A1	Example of auger spacing patterns	47
Figure 16	Right-of-way over muskeg terrain	19	Figure B1	GPR ice profiling equipment	50
Figure 17	A scar of a winter road on peatland	19	Figures D2	Emergency Self Rescue	54
Figure 18	Winter road access over a river bank	20			
Figure 19	Flow chart for hazard assessment	21			
Figure 20	Ice Bearing Capacity Chart	28			
Figure 21	Longitudinal ice contraction crack	29			
Figure 22	Freeboard – stationary loads	30			
Figure 23	Long term stationary load	30			
Figure 24	Effect of cleared road on ice thickness	31			

GLOSSARY

APEGGA	Association of Professional Engineers, Geologists and Geophysicists of Alberta.
Best Practice(s)	Widely accepted plans and methods, developed by knowledgeable bodies, that are in compliance with existing laws and regulations and that have been shown over time, through research, evaluation, and practice, to be effective at providing reasonable assurance of desired outcomes.
Circumferential crack	A crack that forms on an ice cover when it is overloaded. These are rounded cracks that are centered around the loaded area.
Deflection test	A field test that determines the load capacity of an ice cover by monitoring deflection of the ice as it is progressively loaded.
Due diligence	The level of judgment, care, prudence, determination and activity that a person would reasonably be expected to do under particular circumstances (Alberta Workplace Health and Safety 2005).
Effective ice thickness	Good quality, well-bonded, white and blue ice that is measured in an ice cover. Poor quality or poorly bonded ice should not be included in the measurement of ice thickness.
Floating fen	Muskeg or peatland consisting of organic terrain that has the water table at the surface (MacFarlane 1969).
Freeboard (of an ice cover)	The difference between the height of the water level and the top of the ice surface in a hole drilled through the ice cover. Usually the water level is below the ice surface because ice is less dense than water and it floats.
Global Positioning System (GPS)	A radio navigation system that allows land, sea and airborne users to determine their exact location, velocity and elevation 24 hours a day, in all weather conditions, anywhere in the world.
Gold's Formula	A formula developed by Dr. Lorne Gold to calculate the allowable load that can be placed on a floating ice cover.

GLOSSARY

Gross Vehicle Weight (GVW)	For the purpose of this Best Practice, this is the total weight of a road vehicle when loaded, i.e., includes the weight of the vehicle itself plus fuel, freight, passengers, attachments and equipment. Experience has shown that weighing the vehicle on a scale is the most accurate way to determine the GVW.
Ground Penetrating Radar (GPR)	A geophysical technique that uses radio frequency energy to image the earth's subsurface. It emits microwave electromagnetic radiation and then detects the reflections from land formations or objects it contacts below the surface.
Hazard	A situation, condition or thing that may be dangerous to the safety or health of workers (<i>Occupational Health and Safety Code</i>).
Hazard assessment	An assessment made in accordance with Part 2 of Alberta's <i>Occupational Health and Safety Code</i> .
Ice bridge	A constructed ice crossing over a river or stream.
Ice cover	The portion of an ice surface that is floating (buoyant) on a river, lake, pond or peatland and that is capable of carrying an external load.
Ice crossing	The portion of a floating ice cover that is used to support moving loads for the purpose of travelling from one side of a water body to the other.
Ice platform (pad)	The portion of an ice cover that is cleared or built with ice to support stationary loads.
Ice profiling	Technique used to measure the thickness of floating ice. It can be carried out with a direct physical measurement or indirectly, using GPR.
Ice road	A seasonal road built over frozen lakes or along rivers for the purpose of transportation. It usually consists of floating ice and ice that is frozen to the ground.
Industry standard	A voluntary, industry-developed document that establishes requirements for products, practices or operations.

GLOSSARY

Operating window	The time during which the ice cover is sufficiently strong to open it to vehicles hauling loads (after construction and before closure).
Professional Engineer	A professional engineer defined under the <i>Alberta Engineering, Geological and Geophysical Professions Act</i> . For the purpose of this Best Practice, the professional engineer should have demonstrated experience in ice mechanics and ice road operations.
Radial crack	A crack that forms on an ice cover when it is overloaded. It radiates away from the load area like a spoke on a bicycle wheel.
Regulation	A legislated minimum standard.
Risk	A measure of the probability and severity (consequence) of an adverse effect to the safety and health of workers, property or the environment.
Standard Operating Procedure	Written instruction detailing all steps and activities of a process or procedure to guarantee the expected outcome.
Water lens	A pocket of water in the ice.
Winter road	A seasonal road built with snow or ice over land and ice for the purposes of transportation. It will normally include ice crossings and ice bridges.

SECTION 1: INTRODUCTION

1.1 BACKGROUND

Several generations of Canadians have used river, lake and sea ice covers to travel to their destinations, to deliver freight, to fish and hunt and, more recently, to enjoy the recreational opportunities leisure time affords them. The earliest of these hardy ice travellers used foot, snowshoes, skis, dogsleds and horse and sleigh.

Pioneers like Svein Sigfusson in Manitoba in the 1940s and John Dennison in the Northwest Territories in the 1960s demonstrated that ice roads were viable alternatives for re-supplying camps and moving goods to remote communities. Today, ice roads and winter roads are constructed in most Canadian provinces and territories to provide temporary access to communities, work sites and recreational areas.

Working, travelling and parking on the frozen surface of ponds, lakes and rivers should be undertaken as a planned activity that recognizes and reasonably addresses the hazards associated with the ability of the ice cover to safely support the load.

In 25 years of hauling freight we lost three men through the ice—a record that might look good in cold actuarial tables but was still a hard reality that caused great lasting sadness to all who did survive. Three deaths, even among thousands of men, inevitably left a tragic tinge on the successes of our company.

Sigfusson's Roads, Svein Sigfusson, 1992

Dog and man watched it crawling along over the ice. Suddenly, they saw its back end drop down, as into a rut, and the gee-pole, with Hal clinging to it, jerk into the air. Mercedes scream came to their ears. They saw Charles turn and make one step to run back, and then a whole section of ice give way and dogs and humans disappear. A yawning hole was all that was to be seen. The bottom had dropped out of the trail.

Call of the Wild,
Jack London, 1903

1.2 PURPOSE AND SCOPE

This Best Practice has been developed to provide a summary of current practices for construction and operation of transportation facilities and working platforms that rely on floating ice for structural adequacy. The focus is on advice that provides effective over-ice operations while ensuring that a standard of care necessary to protect worker safety is the highest priority. The Best Practice covers the basic steps for planning, design, construction, operation and closure of an over-ice project.

This Best Practice was developed to assist employers and contractors in fulfilling their hazard assessment, elimination and control obligations as detailed in Part 2 of Alberta's *Occupational Health and Safety (OHS) Code*. The employer's general duty is to "ensure as far as reasonably practicable" the health and safety of its workers. In general, the OHS Act, Regulation and Code require a risk-based approach, through hazard identification, assessment, elimination and control. This process is identified on the following page.

-
1. Identify the Hazard: Identify existing and potential hazards before work begins.
 2. Assess the Hazard
 - i. Assess the severity of the consequence arising from the hazard in terms of harm to workers, equipment or the environment.
 - ii. Assess the likelihood of the consequence arising from the hazard.
 - iii. Assess and prioritize the hazards based on the risk.
 1. Eliminate or Control the Hazard
 - i. Eliminate the hazard.
 - ii. Employ engineered controls.
 - A. Design controls.
 - B. Monitoring controls.
 - C. Maintenance controls.
 - i. Implement administrative controls.
 - ii. Establish and use personal protective equipment (PPE).

Potential hazards need to be identified and steps taken to eliminate the hazards or control them to a level that remains within normal industry standards while being easily understood and applied by the worker.

This Best Practice applies to work where short-term loads (less than two hours duration) are supported by a freshwater floating ice cover. Examples of common work on ice covers include:

- Traversing ice covers by foot or snowmobile.
- Preparing ice covers for recreational use.
- Profiling an ice crossing from a truck or tracked vehicle.
- Driving vehicles (up to 63,500 kg) over lake or river ice crossings.
- Monitoring ice crossings during winter road construction and operations or during construction of ice pads.

1.3 LIMITATIONS

This Best Practice was developed based on experience with ice covers comprising natural fresh water as well as water used to flood ice for enhanced thickening. There are field conditions that do not fit that criteria and are not covered within this Best Practice. These conditions require the expertise of a professional engineer experienced in ice mechanics and may include:

- Loads on sea ice covers or ice containing dissolved solids.
- Loads on ice covers that are floating on industrial water ponds (such as tailings ponds).
- Loads greater than highway legal Gross Vehicle Weights (GVW) for multi-axle trucks as defined by Alberta Transportation.
- Vehicles with more than eight axles or a GVW greater than 63,500 kg.
- Loads with a significant dynamic or vibrational component such as a heavy caterpillar tractor with steel grouser bars.

1.4 HOW TO USE THIS BEST PRACTICE

Effective use of this Best Practice will improve the standard of care that is normally exercised when planning and carrying out work activities on a floating ice sheet. The safety of individual workers is of paramount importance, and it is recognized that judging safety when working on a floating ice sheet takes expertise that is not necessarily embodied in normal construction practice. The full value of the Best Practice, however, can only be achieved if it is implemented at appropriate stages within any project plan. The following commentary provides suggestions as to where it can be used most effectively.

1.4.1 USE THE BEST PRACTICE AS A PLANNING TOOL

The Best Practice should be consulted early in the planning process. It identifies those steps that must be taken for the work to be done safely and effectively. When several alternatives are being considered concerning the use of ice covers for a working platform, the Best Practice can identify what limitations the ice cover may impose on the work. These considerations may include load limitations, length of season and safety monitoring.

1.4.2 ATTACH THE BEST PRACTICE TO CONTRACTS

Contracts and sub-contracts prepared for industrial activities on floating ice should require acknowledgement of a plan to ensure the safety of workers. In some instances, that plan could include a contractual obligation to follow this Best Practice. This elevates the status of the Best Practice to a legal duty imposed on the contractors that requires them to follow a written procedure as part of their safety practices.

1.4.3 DEVELOP STANDARD OPERATING PROCEDURES

Many larger contractors, consultants and industry leaders are becoming registered users of the International Organization for Standardization's (ISO) quality assurance standards. Within that system is a requirement to document "Standard Operating Procedures." This Best Practice could form the basis for developing in-house procedures for firms that frequently carry out activities on floating ice.

1.4.4 USE THE BEST PRACTICE FOR HAZARD AWARENESS TRAINING

The Best Practice can form the basis of hazard awareness training for workers preparing for activities on floating ice. Instructional aids and materials, including this Best Practice and accompanying field guide and online eLearning module, are available to assist employers in training their workers.

1.4.5 USE THE BEST PRACTICE TO REDUCE RECREATIONAL RISK

This Best Practice has been developed primarily for employers and workers; however, it may also be helpful to recreational users who are considering travelling over ice covers or participating in activities on them, for example, ice fishing.

SECTION 2: ICE COVER HAZARDS AND FACTORS TO CONSIDER

2.1 BACKGROUND

Planning for operations over floating ice covers requires a clear understanding of how the ice sheet must function to ensure a successful and safe project. This is especially important for contractors who have no previous experience building ice covers. The following operational parameters must be identified at the outset:

- **Load duration:** The period of time that the load is stationary on the ice cover.
- **Ice cover type:** Freshwater lake ice, river ice, local flood ice, transported flood ice or peatland ice.
- **Load weights:** The number and types of vehicles and equipment and their maximum Gross Vehicle Weights (GVWs); this may also include loads imposed by foot traffic for special types of work.
- **Schedule and operating window:** Timing of the start of construction and start of work on the ice cover as well as the operating window required for the work.
- **Contractor capability:** Contractor's experience, equipment availability and worker training.
- **Hazard controls:** Controls that reduce either the consequence or the likelihood of a hazard; choice of controls depends on the risk level, degree of operator control over the use of the cover and the user's exposure.
- **Route selection constraints:** Site access, hydrology and site permits.

It is also important to consider who will be exposed to the hazards associated with the ice cover: the contractor's crew, vehicle operators and members of the public. Normally, the contractor's crew face the greatest risk because crew members go out on the ice with minimal information at the start of the season. This can be dealt with by adhering to controls implemented during the pre-construction and construction phases. Although vehicle operators may be hauling the heaviest loads, the hazards they are exposed to are minimized through use of the hazard controls.

Members of the public may be at risk if they attempt to access an ice cover when it has been closed by the operator and the operational controls are no longer in place. Consequently, it may be necessary to develop other controls to deal with hazards to the public.

2.2 ICE COVER TYPE

Ice type considers how the ice forms, a factor that affects the ice cover's strength, variability and quality. Freshwater ice, often referred to as blue ice, forms naturally on lakes and rivers and can be similar in strength across all surfaces (Figure 1). Rivers are more dynamic and subject to currents, so are consequently more variable (Figure 2). Natural flood (white) ice, which occurs when water floods the surface of natural ice, can be of lesser quality due to the presence of snow and unfrozen water (Figure 3). Constructed flood ice built by qualified personnel with good practices can generate ice that is comparable to freshwater blue ice in strength and uniformity. The ice types with the least strength and quality are frazil ice (Figure 4) and jam ice (Figure 5).

ICE TYPES (Ashton 1985)

1



Figure 1
Clear blue lake ice

Blue ice

Ice that grows below the layer of surface ice under calm conditions. It usually forms in vertical, columnar crystals that contain few air bubbles. It appears to be blue because it's clear enough to see the water underneath it.

2



Figure 2
Clear blue river ice

3



White ice (snow ice)

Ice that forms on top of the surface ice by natural or man-made flooding of snow. It's white because it contains a significant number of air bubbles.

Figure 3
White (snow) ice

4



Frazil ice (slush ice)

Ice made up of disk-shaped ice particles that form and join together in agitated water. It is usually found in rivers or streams with turbulent waters.

Figure 4
Frazil ice (slush ice)

5



Jam ice

An accumulation of ice that often forms on rivers or streams. It occurs when currents move pieces of ice cover to an area where they accumulate and freeze together to form very rough and thick ice covers.

Figure 5
Jam ice

Peatland ice cover or frost depth (depth at which the peat is well bonded by ice) poses a greater risk because it can be overlooked. The depth of frost depends on the air temperature, composition/depth of peat or mineral soil, and the type of ground cover. The strength of saturated frozen peat depends on the peat's composition, water content and temperature.

It does not make sense to apply the same risk management practices to both good quality lake ice and poorer quality natural flood ice. Higher loads could be used for reliable freshwater lake ice that has good ice monitoring data and a high level of operational controls. Lesser loads would be used on natural flood ice, which is less likely to have uniform ice thickness and quality.

TABLE 1: ICE TYPES AND THEIR VARIABILITY		
Ice Type	Ice Thickness	Quality and Strength
Freshwater lake (blue) ice	Low variability over an area	Uniform ice quality
		Higher strength due to low variability
River (blue) ice	Medium to high variability over an area	Fairly uniform ice quality
	More prone to losing underside ice thickness to currents	Variable strength due to variable ice thickness
Natural flood or overflow (white) ice	High variability over an area	Strength may vary due to variations in ice quality and thickness
	More potential for water lens	Higher air content causes variable quality
Constructed flood ice	Good practices build uniform ice	Uniformity and quality depend on construction practices
Peatland ice	High variability	Strength is highly variable due to water chemistry and temperature
		Frost depth depends on air temperature, peat composition/ thickness and ground cover
		Requires specialized analyses and investigation of ice conditions

2.3 TYPES OF ICE COVER CRACKS

Any ice cover will have cracks caused by thermal contraction or movements in the ice cover. Cracks do not necessarily indicate a loss in the load bearing capacity of the ice, except when they are wet or they are radial or circumferential cracks associated with overloading the ice.

Eight mechanisms that cause cracks in ice covers are:

- Excessive loads.
- Differences in ice thickness and buoyancy.
- Snowbanks.
- Thermal contraction of ice.
- Thermal expansion of ice.
- High winds.
- Water level fluctuations.
- Dynamic waves.



Figure 6
Plan view of radial (spoke-like) and circumferential (round) cracks forming on overloaded ice

Load-induced cracks are those caused by moving/stationary loads that are too heavy for the ice. Field studies have shown that gradually overloading the ice leads to three stages of cracking, as shown in Figure 6:

- **Radial cracks** may be observed originating from the centre of a load, like spokes on a bicycle wheel. This usually occurs at about one half of the failure load. Radial cracks are a warning that the ice is overloaded and the load should be removed immediately.
- **Circumferential cracks** are those that start forming a circle around the load. Circumferential cracks circle the load like the ripples caused by a stone tossed in a pond. They are a warning that the load is about to break through the ice and personnel should be evacuated from the loaded area.
- **Circumferential cracks that connect with radial cracks** to form pie-shaped wedges indicate the ice has failed at this point and the load can fall through at any time, as experienced by the D10 Caterpillar operator in Figure 7.

Figure 7

Breakthrough of a D10 Caterpillar tractor following formation of a circumferential crack pattern



Thicker ice can provide a warning, but thinner ice can fail so rapidly that radial cracking cannot be relied on for any warning.

Figure 8

Normal longitudinal cracking caused by buoyancy of the thickened ice over the 20-metre wide travel lane



Differences in ice thickness and buoyancy cause longitudinal cracks to form along the road in the middle of the cleared lane (Figure 8). As discussed in Section 4.1.6, the thicker ice in the cleared lane rises above the ice that's depressed beneath the heavy snow banks. This causes an upward bending of the ice cover that reaches a maximum in the middle of the cleared lane. When the bending becomes severe enough, cracks form on the surface of the ice to relieve the stresses. In most cases, the cracks do not extend deep enough to create a breakthrough hazard.



Figure 9
Longitudinal cracks that have intersected and caused a block of ice to pop out

Sometimes several longitudinal cracks can intersect on the surface. Under the right conditions, a shallow piece of ice can pop out (Figure 9). These pop-outs, like potholes on regular roads, are a hazard because they can cause vehicle damage.



Figure 10
Evidence of wet cracks underneath a snow bank from water that flowed through the cracks and froze on the surface

Cracks can occur under snowbanks that are built by snow piled into windrows along the edge during snow clearing, as shown in Figure 10. These cracks form because the snow depresses and bends the ice cover underneath the snow. Cracks are also more likely to form because the ice cover is thinner here due to the insulating effect of the snow. Most of these cracks start on the bottom and extend upward but they usually do not reach the surface. However, some of these cracks extend to the top of the cover, creating a wet crack that is a hazard. These cracks should be monitored and repaired by flooding when necessary. No operational activities other than snow clearing should be permitted within five metres of the snowbanks.

Thermal contraction cracks are caused when ice shrinks due to significant cooling. These cracks are usually distributed randomly over the ice and spaced well apart. Snow removal tends to promote thermal contraction cracks because it exposes the surface to rapidly changing air temperatures. Thermal contraction cracks are usually dry but should be monitored because they can become wet cracks if they are subject to further contraction or heavy loads.

Thermal expansion can lead to pressure ridges, which are portions of the ice sheet that have moved together to form ridges that can rise up to three metres above the surface and extend for hundreds of metres (Figure 11). These ridges often occur after the formation of thermal contraction cracks that have filled with water and refrozen. If there is a sudden warming of the ice, then the ice sheet expansion is accommodated by upward movements of ice at weak (thin) locations in the ice sheet. These tend to form on larger lakes (several kilometres across) where the thermal expansion effect can accumulate over large distances. Pressure ridges can challenge operators because they can be areas of reduced bearing capacity or sources of water, or be difficult to cross. Pressure ridges can recur over several years and local knowledge may help in identifying potential pressure ridge locations.

Wind cracks often result in ridge formation that can be parallel or perpendicular to the shoreline. Ice covers should be inspected for wet cracks after experiencing sustained winds of 55 km/h or more early in the season. Wet cracks must either be repaired or avoided by relocating the activities on the ice cover.



Figure 11
Pressure ridge about two metres high and several hundred metres long that formed adjacent to a road over lake ice



Figure 12
Hinge crack that became a break along a lake shoreline when the water level dropped

Water level fluctuation cracks usually occur in rivers but can occur in lakes when lake levels change. Cracks can also occur in rivers downstream of dams that control water levels. These cracks are almost always wet, tend to follow the shoreline and occur around grounded ice features. In severe cases, the ice cover can separate completely and form a significant drop (Figure 12). It is best to avoid areas of grounded ice features that have water level fluctuation cracks around them. These cracks should be checked before permitting loads to cross them.



Figure 13
Blowout caused by speeding vehicles creating dynamic waves that release their energy at weak areas in the ice

Dynamic waves caused by vehicles travelling too quickly over the ice can cause ruptures in the ice where it is thin or weak. The most common form of rupture is the crown shaped blowout (Figure 13). These can be two to 20 metres across but tend to occur away from the thickened ice and in thinner ice areas.

2.4 TYPES OF LOADS

Load types consider the anticipated demand on the ice cover in terms of the number and weight of the loads (Figure 14). Five load types are identified:

- Foot traffic (total load less than 120 kg) such as workers carrying out initial testing of the ice.
- Snowmobiles (total load less than 500 kg) used at the beginning of the season to pioneer a trail for ice road clearing or for one-time access to a site.
- Light vehicle traffic (total load less than 5,000 kg) to move personnel and light equipment to a work site across an ice cover that has been cleared of snow to promote ice growth.
- Construction vehicles/equipment, including amphibious vehicles (total load less than 22,500 kg) used to clear snow and build ice.
- Heavy vehicle traffic (22,500 to 63,500 kg) for moving heavier equipment across an ice cover that has been cleared/built for this purpose.

Heavier and more frequent loads require greater hazard controls to offset the higher risk of ice failure.

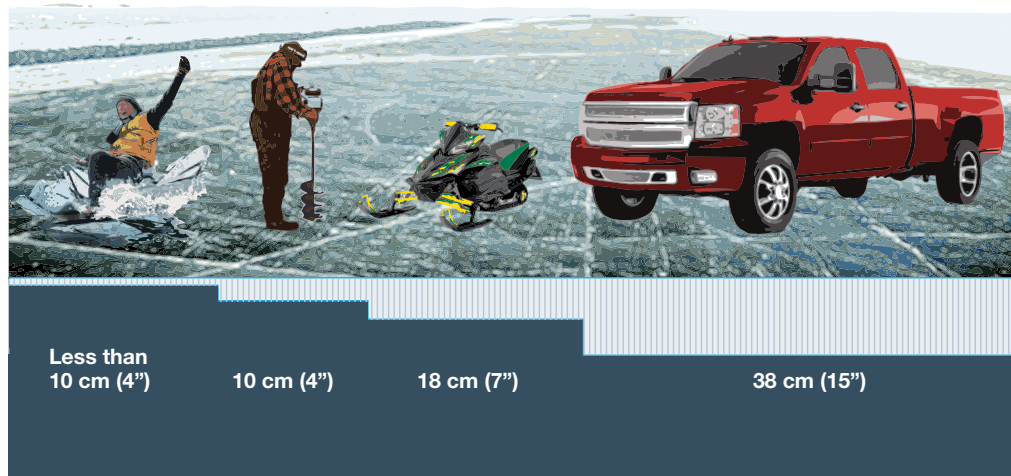


Figure 14
Recommended minimum
ice thickness

2.5 LOAD DURATION

Load duration must be considered because it affects the success or failure of the ice cover and the way the carrying capacity is analyzed (Table 2). Vehicles moving across the ice cover are analyzed using a different design approach than is used for stationary (immobile/parked) loads such as a drill rig or disabled vehicle sitting on the ice cover.

TABLE 2: LOAD DURATION		
Load Duration	Observed Effects	Design Options for Carrying Capacity
Slow moving loads with stops of short duration (less than two hours)	Initial cracking of the ice cover	Refer to Section 4
Stationary loads of medium duration (less than seven days)	Ice deflection that approaches freeboard	Special analyses in Section 4.1.5
Stationary loads of longer duration (more than seven days)	Excessive creep deflection — water on the ice	Professional engineer must review

Vehicle spacing is a factor that is addressed in Sections 5.2.3 and 5.2.4.

This Best Practice provides some specific recommendations for slow moving vehicles (less than 25 km/h) and short duration (less than two hours) stationary loads on ice covers. For medium-duration loads, some preliminary recommendations are provided for loads less than 5,000 kg; heavier stationary loads require recommendations from a professional engineer.

2.6 SCHEDULE AND OPERATING WINDOW

Scheduling of ice cover operations depends on ice quality and strength, weather conditions and traffic requirements.

Weather conditions usually dictate the timing of construction start-up. Air temperatures and snow cover affect the growth of the ice cover (extent of cover, thickness and stability). Climatic data and local ice conditions are important for evaluating the probable range of operating period.

Traffic requirements should be defined by traffic volume (number of crossings per season):

- Very low (<10 crossings).
- Low (10 to 50 crossings).
- Medium (51 to 100 crossings).
- High (>100 crossings).
- Very high (>1,000 crossings).

A project with a high number of vehicle crossings could require that an ice cover remain open for as many days as possible, so achieving an early start can be very important. For projects with a low number of vehicle crossings, a long ice cover season is not as critical; therefore, identifying a few weeks within a season to safely move a few heavy loads may be the priority.

A preliminary schedule needs to be established to determine what seasonal conditions or constraints exist.

2.7 CONTRACTOR CAPABILITY

Experienced contractors may take the overall responsibility for planning, preparing, designing, building and operating ice covers. The contractor's experience can therefore be critical in selecting the route, equipment and people required to build and operate a successful ice cover. Owners of the ice cover may maintain overall project control, but the contractor's role remains crucial to the successful construction and operation of the ice cover.

The following attributes should be considered when reviewing a contractor's capabilities:

- Experience in building similar ice covers.
- Experience in building ice covers in the same region.
- Experience of key staff.
- Availability of equipment for construction.
- Health and safety plan for working on ice.
- Demonstrated knowledge and understanding of this Best Practice required for the safe construction, maintenance and operation of ice covers.

2.8 ROUTE AND SITE CONDITIONS

The use of floating ice covers is most frequently associated with seasonal transportation facilities such as winter roads or ice bridges. Winter roads make use of ice covers on lakes and peatlands that will not support traffic loading unless frozen. Ice bridges are a common feature on the major rivers of northern Alberta such as the Peace and Athabasca. Winter roads and ice bridges can improve or provide access to remote communities or allow seasonal access for construction or re-supply at remote sites. Use of ice covers for seasonal transportation purposes requires route planning and recognition of certain site features that will directly influence the application of this Best Practice. Those features that must be recognized and evaluated in the planning process are discussed in this section.

2.8.1 PREVIOUS LOCAL EXPERIENCE

The first step in planning for use of an ice cover is to thoroughly evaluate previous use of ice covers along the route or at the site under consideration. Much of the technology for understanding ice behaviour has evolved from field observations and experience. Contractors with prior experience with similar ice covers at the site or at nearby sites can provide field experience that is valuable. However, caution is still advised when considering field experience because water levels, weather and ice conditions can vary from year to year. Contractors may have to alter their methods and equipment to adapt to changes in ice conditions that differ significantly from what they're accustomed to seeing.

2.8.2 LOCAL CLIMATE

Ice growth and capacity is directly linked to the climatic conditions at the site during the time of construction activities. The parameters of importance are mean daily temperature and snow cover. Local climatic variations may have to be considered when applying temperature and snowfall data from a meteorological station near to the project location.

Current and historical data for weather stations throughout Alberta is available from Environment Canada's Climate Data Online website:

http://www.climate.weatheroffice.ec.gc.ca/climateData/canada_e.html

Throughout Northern Canada, warming trends caused by climate change are affecting the function and design of seasonal infrastructure that relies on frozen conditions. The greatest changes are being documented during the winter months in the northern most part of the provinces and territories. The last published Canadian Climate Normals, a 30 year running average of climatic data to which any individual year is compared, are for the period 1971 to 2000. The last 10 years have experienced three of the warmest winters on record; therefore, it is reasonable to expect that the new Climate Normals (expected in 2011) will show a significant increase in what is considered a normal air temperature throughout northern Alberta. What may be of greater significance is the range of variability currently observed between a "warm year" and a "cold year." This variability, coupled with the substantial changes in precipitation that accumulates as snow on the early season ice surface, can impede normal ice growth.

A parameter that is useful for planning purposes and for tracking the onset of winter freeze-up is the Air Freezing Index. The months of November through March generally produce negative mean daily temperatures that represent the freezing potential as winter deepens; these mean temperatures accumulate over the number of days in the months throughout the winter and are expressed as "degree-days" (°C-days). Tracking the accumulated degree-days for a station as the winter develops provides an indication of the winter's severity, which can then be linked to ice growth. A plot of the Air Freezing Index for the station at Fort McMurray is shown in Figure 15.

Warm Winter of 2005/06 Alberta Towns Isolated after Winter Road Ice Melts

About 1,000 people in northern Alberta communities have been cut off from the world after unusually warm weather prompted officials to close the only road through the area. At least one man is trapped in an isolated community with a rental car that he can't get back to the lender. Other residents fear shortages of food and fuel.

The winter road, which is usually open from December to March, stretches about 280 km from Fort McMurray to Fort Chipewyan. Much of the road travels over frozen lakes, rivers, muskeg, mudflats and sand dunes in the Athabasca River Delta.

But temperatures in late December hovered at or above 0 C, which is 20 to 30 degrees warmer than normal. Will Fletts said he knew there was something wrong with the winter road; as he drove on a river, he could hear water flowing beneath the ice under his tires.

Excerpt from CBC News report, December 28, 2005

These annual comparisons are the only forward-looking tool for predicting trends and planning contingency measures for projects. The 2005-06 Fort McMurray data suggest the early December data was fairly indicative of the general trend for that warm winter. Such a warm winter necessitates the use of contingencies to maintain safe operations over floating ice.

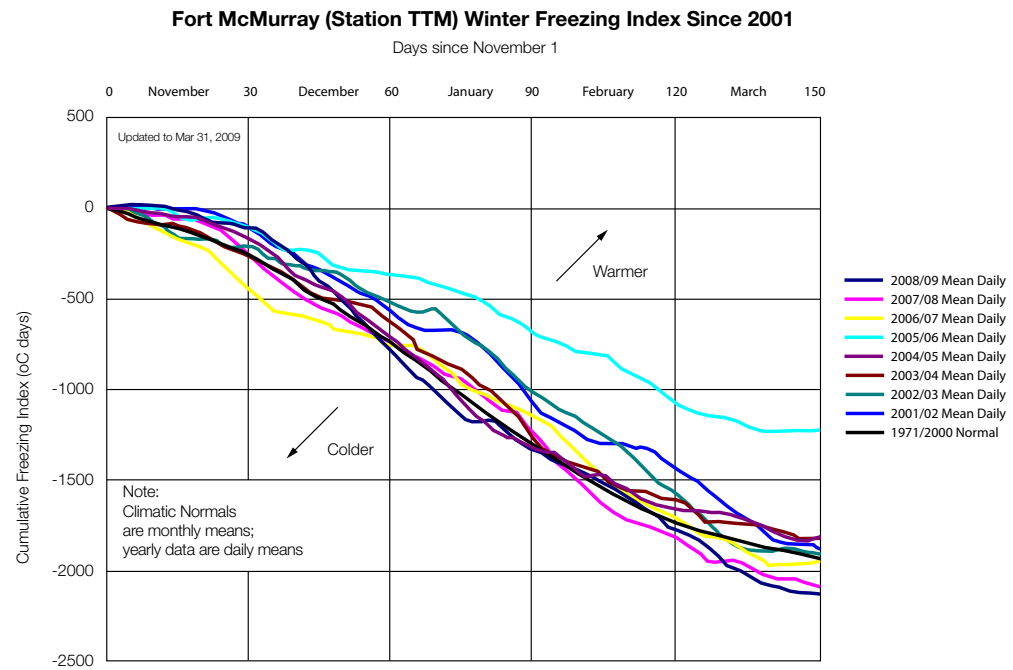


Figure 15
Fort McMurray Air Freezing Index
courtesy of EBA Engineering

2.8.3 ROUTE SELECTION OVER LAKES, PONDS AND MUSKEG TERRAIN

The following factors must be considered at the planning phase when lake ice is used in a winter road route alignment:

- **Access onto and off the lake ice surface:** This must be a technically and environmentally acceptable route.
- **Water depth along the chosen lake crossing:** A rough bottom condition caused by unforeseen shoals and sandbars can initiate lake ice fractures and should be avoided wherever practical.
- **Overall water depth along the route:** A route that follows continuous deep water is often the most effective alternative, particularly for heavy loads that require severe speed restrictions to manage the ice deflections that occur from movement in the ice and water.

Routing a winter road across frozen peatlands can also expose workers to ice failure hazards that are often overlooked. Open peatland or muskeg terrain in northern Alberta is commonly a mosaic of bog and fen landforms, as shown in Figures 16 and 17. The fens can be ponds that are hidden by a thin layer of floating live vegetation. There are documented cases of construction equipment breaking through thin frozen peat unexpectedly, resulting in an operator fatality.

Planning winter routes over peatland requires the same caution as planning routes over rivers. A terrain assessment carried out by a geomorphologist or geotechnical engineer using stereo aerial photos will identify areas at risk. Aerial photography and summer aerial views can provide important information. This assessment should be verified by route reconnaissance, and appropriate plans should be developed to monitor the thickness of ice or frozen peat before construction equipment is deployed.



Figure 16
Right-of-way over muskeg terrain

Muskeg terrain is sensitive and there may be requirements to minimize damage from a winter road. A scar of a winter road across this type of terrain is shown in Figure 17.



Figure 17
A scar of a winter road
across peatland

2.8.4 RIVER AND STREAM COVERS

River ice is less predictable than lake ice. It is affected by fluctuating water levels, under-ice currents, and bottom conditions that can shift from year to year. Specific route or site factors that must be carefully considered when planning ice bridges across rivers include:

- **Choose the best site:** Where several crossing sites are considered practical, choose the site that has the deepest water and most uniform bottom conditions. This is often the widest crossing site, unlike an appropriate crossing for a structural bridge. Be cautious of the proximity of islands because they are features that are commonly created by active erosion or deposition, signifying channel shifting and unpredictable currents.
- **Be aware of variations in ice thickness:** The presence of naturally drifting snow on river ice combined with under-ice currents can result in highly variable ice thickness. These conditions require a high degree of vigilance to confirm and monitor ice growth and variations in ice thickness. It is recommended to have ice thickness verified with accuracy by technical aids such as Ground Penetrating Radar (GPR) profiling.
- **Map the river bottom:** Sand bars and other features that determine bottom topography can affect ice cover thickness and extent. River bottom topography should be mapped with either manual water depth measurements or with geophysical methods (sonar or GPR).
- **Ensure river bank is stable:** Locations for access to and from the ice surface should be chosen where river bank stability is considered acceptable from hydrological, geotechnical and environmental perspectives.
- **Be aware of other factors:** Water level under the ice can be affected during the operating period by factors that are not common but on occasion have been known to result in unsafe conditions. For example, river estuaries near tidewater affect ice bridges on the James Bay Winter Road in Ontario. The presence of high dams, such as the Bennett Dam in British Columbia, can be a threat to water levels supporting ice bridges on the Peace River in Northern Alberta. River flow data can be obtained from the Water Survey of Canada: http://www.wsc.ec.gc.ca/index_e.cfm?cname=main_e.cfm.



Figure 18
Winter road access over
a river bank

SECTION 3: ICE COVER HAZARD CONTROLS

The hazard management approach adopted in this Best Practice is shown in Figure 19 and the following example, where the risk of ice breakthrough and cold water immersion is assessed for an ice road.

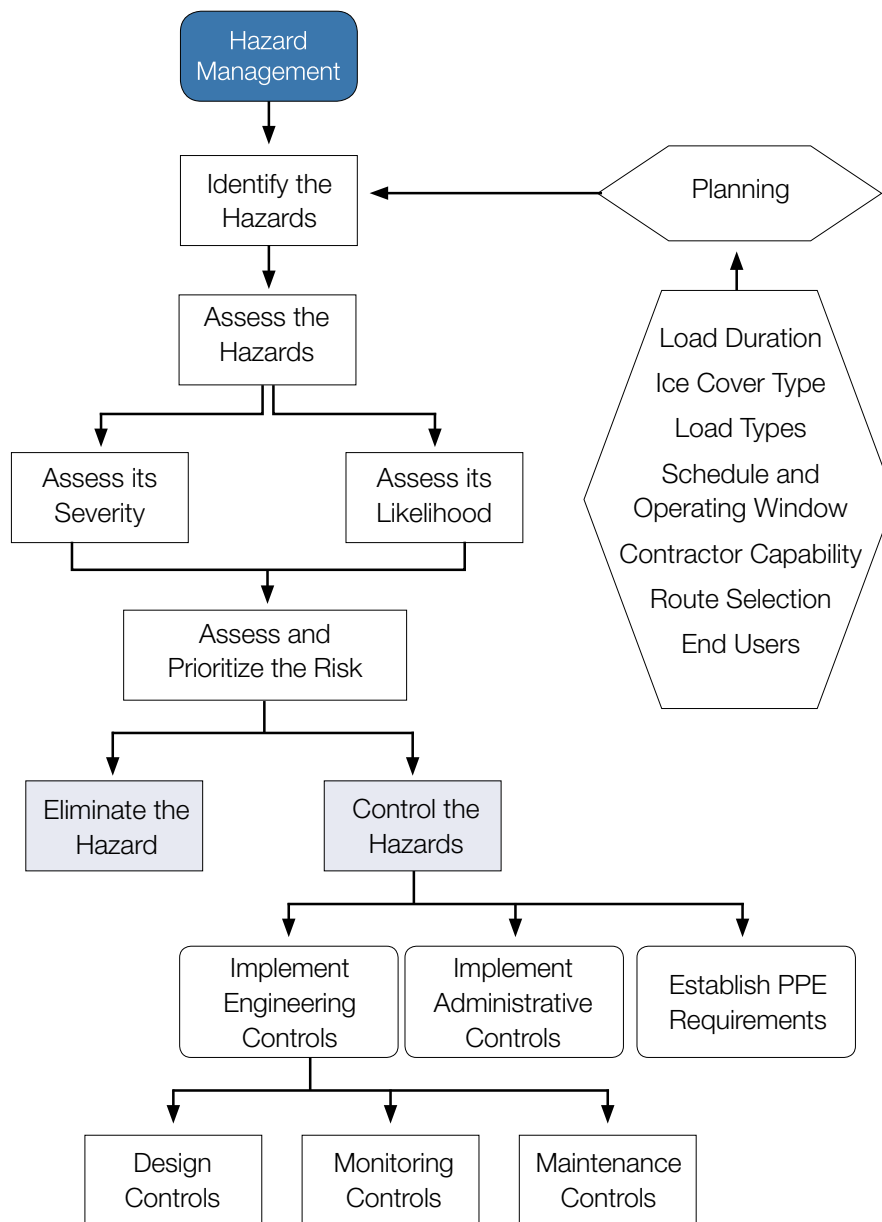


Figure 19

Flow chart for hazard assessment, elimination and control for working on floating ice covers

-
1. Identify the Hazard: failure of the ice cover and breakthrough of a person or vehicle.
 2. Assess the Hazard
 - i. Assess the severity of consequences: fatality; loss of property; short-term cover closure and repair.
 - ii. Assess the likelihood of consequences: likely to remote with a potential of once in the life of the ice cover.
 - iii. Assess and prioritize the hazards based on risk:
 - A. Assess: classify the risk from low to substantial risk according to both severity and likelihood.
 - B. Prioritize: choose a load capacity (and equivalent ice thickness) based on risk level and hazard controls that will be implemented during operations.
 3. Eliminate or Control the Hazard
 - i. Eliminate the hazard: choose another route that does not require an ice cover.
 - ii. Implement engineering controls (Section 4)
 - A. Design controls (Section 4.1)
 - a. Use appropriate bearing capacity factor.
 - b. Design lane widths.
 - c. Adjust road alignment to control speeds.
 - d. Position snow banks.
 - e. Set ice performance criteria.
 - B. Monitoring controls (Section 4.2)
 - a. Define ice quality requirements and restrictions on ice cover use.
 - b. Monitor ice conditions: thickness and ice cracking.
 - c. Identify maintenance actions.
 - C. Maintenance controls (Section 4.3)
 - a. Flooding of thin ice.
 - b. Repair of damaged ice.
 - c. Close ice cover or detour road if conditions do not meet ice performance criteria.
 - iii. Implement Administrative Controls (Section 5)

-
- A. Develop ice safety plan for:
 - a. Construction workers.
 - b. Authorized users.
 - c. Unauthorized users (public).
 - B. Develop and deliver training/awareness programs for:
 - a. Construction workers.
 - b. Authorized users.
 - c. Unauthorized users (public).
 - C. Develop rules of construction and operation:
 - a. Minimum ice thickness for equipment and workers.
 - b. Safe work practices.
 - iv. Establish personal protective equipment (PPE) requirements:
 - A. Identify PPE needed.
 - B. Mandate PPE for contractors' workers.
 - C. Mandate PPE for equipment operators.

Engineering design controls are discussed in Section 4.1. These are controls that are considered during the design phase so that they can be incorporated during the construction and operation of the ice cover.

Monitoring controls are discussed in Section 4.2. These controls are used in conjunction with the monitoring criteria set out during the design phase to determine when the ice cover is ready for construction or operations, or when there is a need for repairs or maintenance. They involve measuring the ice thickness and regularly observing ice cover quality (cracking).

Maintenance controls are discussed in Section 4.3. These controls are used in conjunction with the performance criteria and monitoring programs to address portions of the ice cover that may be compromised by poor ice conditions (e.g., cracking or thin areas).

Administrative controls are discussed in Section 5. These controls, documented in your Ice Safety Plan, must be explained to workers who will work on the ice, including the hazards they may encounter and the steps they need to take to reduce their exposure to the hazard.

PPE requirements for workers and their safety equipment are listed in Appendix C.

SECTION 4: ICE COVER DESIGN, MONITORING AND MAINTENANCE

4.1 DESIGN CONTROLS

4.1.1 GOLD'S FORMULA

All guidelines currently in use in Canada are based on a technical paper published by Dr. Lorne Gold in 1971 entitled "Use of Ice Covers for Transportation". Gold's Formula is

$$P = A \times h^2$$

where:

P is the allowable load in kilograms

A is a parameter that depends on the strength of the ice


h is the effective thickness of good quality ice (cm)

Gold suggested a range of A values for lake ice that corresponds to a range of safe ice thicknesses for a given load or a range of acceptable loads for a given ice thickness. However, at higher A values within these acceptable ranges, additional hazard controls must be implemented to reduce risk of break through to an acceptable level. Table 3 identifies allowable loads for a measured ice thickness for various A values that are in common use together with an interpreted level of risk. Table 4 describes the hazard control procedures to be used for the A Value and interpreted level of risk.

For example, if your task is to move a load of 15,000 kg across an ice cover, you have may choose of A values of 3.5, 4, 5 or 6. If you need to get the load across the ice and have a very short schedule and operating window, then you could select an A value of 6 because it requires a minimum ice thickness (h) of 50 cm. However, this is a substantial risk that would require you to implement the hazards controls identified for substantial risk in Table 4. Alternatively, if you prefer a lesser risk, then you could select a low risk A value of 3.5, where the minimum ice thickness (h) is 70 cm. This A value requires the hazard controls identified for low risk in Table 4.

In between these two A values are two other choices: A of 4 and A of 5. An A value of 4 is tolerable risk and the minimum ice thickness for 15,000 kg is 65 cm. An A value of 5 is moderate risk and the minimum ice thickness for 15,000 kg is 55 cm. Both require you to implement the corresponding hazard controls in Table 4 for tolerable and moderate risk.

TABLE 3: ALLOWABLE LOADS IN KGS FOR A-VALUES AND EFFECTIVE ICE THICKNESS

h=Effective Ice Thickness (cm)				
	A=3.5	A=4	A=5	A=6
	Low Risk	Tolerable Risk	Moderate Risk	Substantial Risk
20	1400	*	*	*
25	2200	*	*	*
30	3150	*	*	*
35	4300	4900	6120	7350
40	5600	6400	8000	9600
45	7100	8100	10100	12100
50	8750	10000	12500	15000
55	10600	12100	15100	18100
60	12600	14400	18000	21600
65	14800	16900	21100	25300
70	17100	19600	24500	29400
75	19700	22500	28100	33700
80	22400	25600	32000	38400
85	25300	28900	36100	43300
90	28300	32400	40500	48600
95	31600	36100	45100	54100
100	35000	40000	50000	60000
105	38600	44100	55100	**
110	42300	48400	60500	**
115	46300	52900	**	**
120	50400	57600	**	**
125	54700	62500	**	**
130	59100	**	**	**
Limitations: This table must be used in conjunction with the hazard controls identified in Table 4				

* Refer to Table 5

** Seek the advice of a professional engineer

Gold's Formula has been used extensively since 1971 and forms the basis for all published ice capacity guides. However, it is not an infallible measure of the carrying capacity of an ice cover and must be combined with ice monitoring, maintenance and administrative hazard controls.

The required ice thickness for a given vehicle load must be determined in conjunction with the hazard control process outlined in Section 3. An appropriate A-value is chosen based on balancing risk level against operational controls. Those controls are usually linked to project requirements. For example, if the project requires heavy vehicle traffic and a high traffic volume, then it may not be feasible to design and build an ice cover based on a conservative (low) A-value. However, the risk posed by choosing a higher A-value can be balanced by implementing hazard controls to reduce the risk of the breakthrough hazard. Table 4 shows how A-values are used with appropriate controls to maintain the safety of the ice cover.

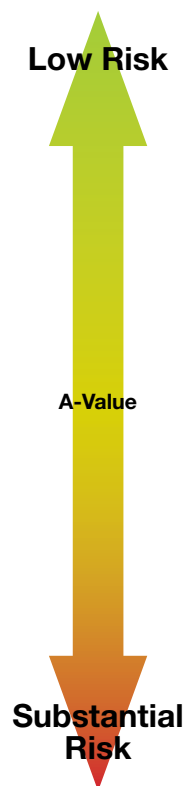


TABLE 4: A-VALUES AND HAZARD CONTROLS (NOT TO BE USED FOR LOADS LESS THAN 1,500 KG—USE TABLE 5)					
A-value Lake Ice	A-value River Ice	Level of Risk	Hazard Controls		
			Monitoring Controls	Maintenance Controls	Administrative Controls
4	3.5	Low	Manual ice measurements and checking of ice quality	Repairs and maintenance as needed	<ul style="list-style-type: none"> • Ice safety plan • Orientation and instruction for workers and operators • Routine worksite observations to enforce rules of ice cover
5	4	Tolerable	<ul style="list-style-type: none"> • Program of regular manual ice measurements • Ice quality monitoring program 	Repairs and maintenance as needed	<ul style="list-style-type: none"> • Ice safety plan • Orientation and instruction for workers and operators • Routine worksite observations to enforce rules of ice cover
6	5	Moderate	<ul style="list-style-type: none"> • Daily program of regular ice measurements or program for regular GPR ice profiling plus manual ice measurements • Ice quality monitoring program 	Regular repairs and maintenance	<ul style="list-style-type: none"> • Ice safety plan • Orientation and training for workers and operators • Daily enforcement of rules of ice cover
7	6	Substantial – special provisions	<ul style="list-style-type: none"> • Program for regular GPR ice profiling and manual ice measurements. • Ice quality monitoring program – flexibility for alternate measurements 	Daily program of repairs and maintenance	<ul style="list-style-type: none"> • Ice safety plan • Orientation and training for workers and operators • Daily enforcement of rules of ice cover

4.1.2 EFFECTIVE ICE THICKNESS

Effective ice thickness (h) as established in Table 3 is defined as the good quality, well-bonded white and blue ice that is measured in an ice cover. Poor quality or poorly bonded ice should not be included in the measurement of ice thickness. The following are examples of ice that should be excluded from the measurements if they are encountered:

- Ice layer with water lens (>5 mm diameter) with a cumulative volume greater than 10% of the total volume.
- Ice layer with visible incompletely frozen frazil (slush) ice.
- Ice layer that is poorly bonded to the adjoining layer.
- Ice layer that has been found to have a strength less than 50% of good quality blue ice (a number of specialized methods are available for determining ice strength).
- Ice that has wet cracks.

The number and coverage of the ice thickness measurements can also factor into the calculation of the allowable loads—more measurements increase the confidence of ice measurements, as does taking the measurements over a wide area. Follow the procedure described in Ice Monitoring Controls (Section 4.2) to determine the minimum ice thickness. Table 3 and Figure 20 show the calculated loads for A-values. Table 4 describes the hazard controls to be used with the A value and interpreted level of risk.

4.1.3 RECOMMENDED SHORT-TERM WORKING LOADS ON ICE COVERS

It is important to determine the weight of the equipment or vehicles before they are placed on the ice cover. Although equipment/vehicle manuals often provide weights, these often do not include the weight of fuel, extra equipment or personnel. When in doubt, equipment or vehicles should be scaled to determine actual weight.

A professional engineer should provide recommendations for loads greater than 63,500 kg (e.g., highway legal 8 axle Super B tractor-trailers).

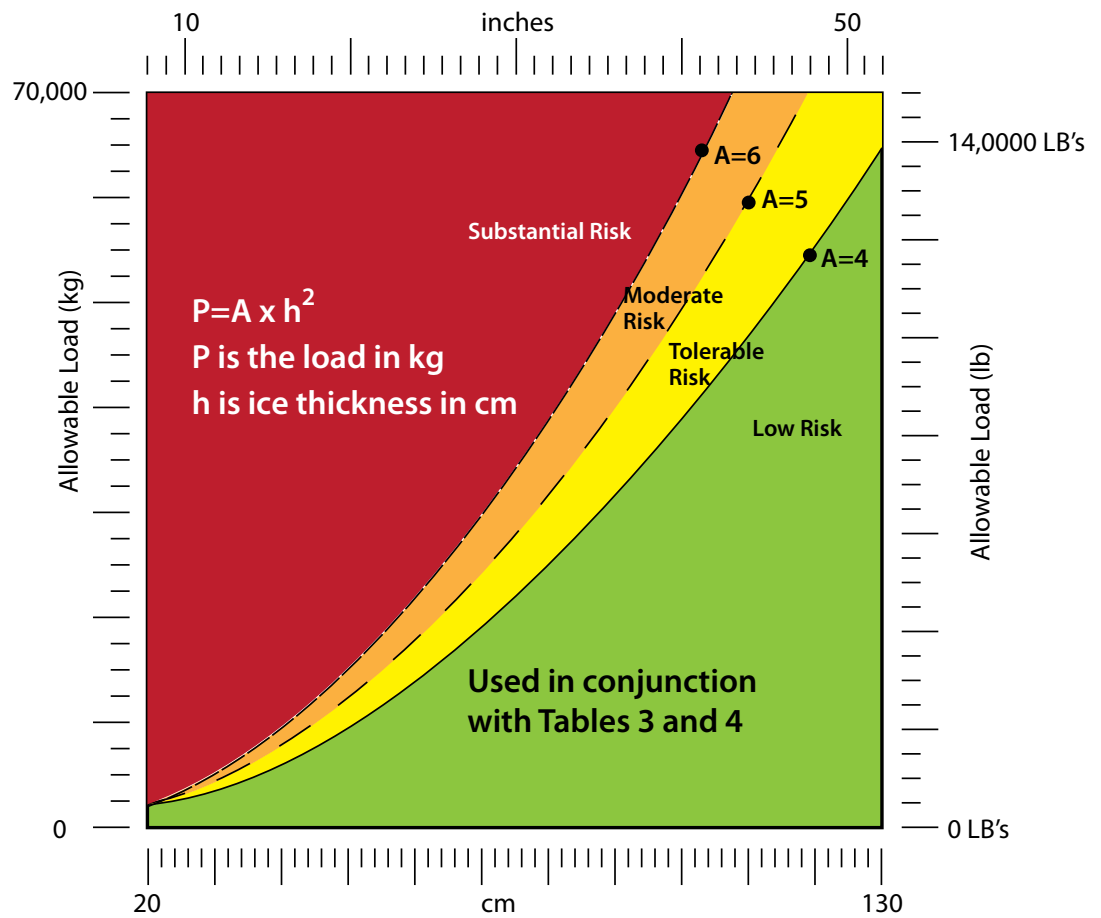


Figure 20
Ice Bearing Capacity Chart

Gold's Formula, Table 3 and Figure 20 should not be used to estimate the minimum ice thickness for loads less than 5,000 kg. Instead use Table 5.

TABLE 5: MINIMUM ICE THICKNESS FOR LIGHTER LOADS	
Load / Situation (Slow Moving Loads)	Minimum Effective Thickness (cm)
Person walking (120 kg)	10
Snowmobiles (Maximum weight machine + rider <500 kg)	18
¾ ton 4x4 vehicles (Maximum GVW of 5,000 kg)	38

Limitations: must be used in conjunction with hazard controls outlined in Table 4 for A=4 for lake ice or A=3.5 for river ice.

4.1.4 EFFECT OF SUDDEN AND EXTREME TEMPERATURE CHANGES

Rapid Cooling of the Ice

Sudden temperature drops (e.g., more than 20°C over a 24-hour period) produce severe thermal stressing as ice contracts (shrinks). During ice contraction, dry cracks (Figure 21) can form or existing cracks can grow and these could become wet if they extend through the entire thickness. The ice cover should be checked for cracks that may affect load capacity; determine what, if any, steps are necessary to maintain load capacity. Snow cover on the ice may slow down thermal changes and can hide cracks.



Figure 21
Longitudinal ice contraction crack

Warming of the Ice

A warm period when the air temperature remains above freezing for 24 hours or more allows the ice to warm rapidly from the surface down. These effects are greatest on bare ice and are reduced by increasing depths of snow cover. Even though the ice may have adequate thickness, ice strength can be substantially reduced the longer it is exposed to sunlight and above freezing temperatures (Ashton 1986).

If the average air temperature exceeds 0°C for more than 48 hours, then the following steps should be taken:

1. Determine the minimum ice thickness.
2. Calculate the allowable weight for the measured ice thickness using Table 3 and reduce it by 50%.
3. Monitor ice conditions for signs of decay, cracking and water.
4. Re-evaluate the allowable weight if the average air temperature remains below 0°C for more than 24 hours and the ice conditions meet the requirements for strength and cracking.

If circumstances dictate, consult with a professional engineer to assess the load capacity of the ice cover.

Ice bearing capacity can be reduced rapidly if the ice cover is subjected to warm air temperatures in combination with the longer daylight conditions that develop in late March. Operations on the ice should be terminated well before this condition begins.


4.1.5 STATIONARY LOADS

There is a fundamental difference between the behaviour of ice under short-term loads and long-term stationary loads. Under long-term loads (more than two hours but less than seven days), the ice continues to sag or deflect until it fails. Different methods are used to estimate the required ice thickness under stationary loads. There are also differences in how the ice cover is monitored and operated under stationary loads.

Figure 22

Left: Water level in an auger hole showing positive freeboard and no ice deflection

Right: Water level in an auger hole showing no freeboard and water is collecting on the ice because the ice has deflected under the load.

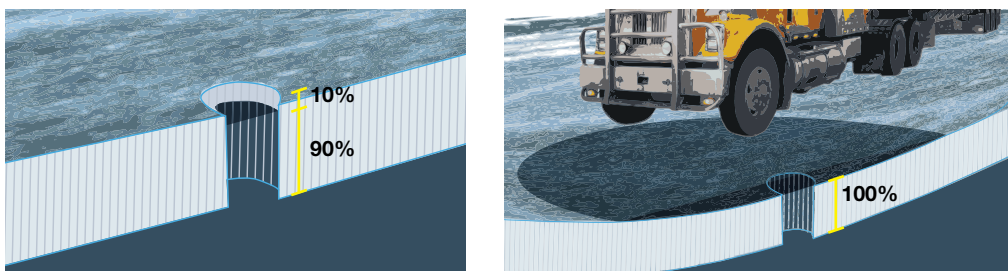

The safety risk in placing stationary loads that are heavier than 5,000 kg onto ice should be analyzed by a professional engineer. Table 6 provides recommended minimum ice thicknesses for vehicles weighing up to 5,000 kg. Under these conditions ice deflection should be acceptable. Ice deflection can be checked by drilling a hole through the ice and measuring the freeboard. Freeboard is the distance measured from the ice surface to the stationary water level in the hole below the surface, and it arises because ice is less dense than water so it floats. If freeboard is less than 10% the ice thickness (Figure 22 left), then the ice is deflecting and should be monitored while the load remains on the ice. Loads should be removed before freeboard reaches zero (Figure 22 right), to prevent water flooding the ice surface through an opening in the ice cover. Figure 23 shows a 200 metric ton bulk sampling drill rig operating on floating lake ice that was 2 metres thick. An extensive ice monitoring program was in place during the 14 days of drilling operations to determine if the ice deflection and ice quality were consistent with performance requirements.



Figure 23

Stationary load (bulk sampling drilling rig) on constructed lake ice about two metres thick

TABLE 6: MINIMUM ICE THICKNESS FOR STATIONARY/PARKED LOADS UP TO 5,000 KG (FOR MORE THAN TWO HOURS BUT LESS THAN SEVEN DAYS)	
Load/Situation	Minimum Effective Thickness (cm)
Person standing	15
Snowmobiles (Maximum weight machine + rider <500 kg)	25
Loaded vehicle >500 kg but <1,000 kg	32
Loaded vehicle >1,000 but <2,000 kg	41
Vehicle >2,000 but <3,000 kg	46
¾ ton 4x4 vehicles (Maximum GVW of 5,000 kg)	55

Limitations must be used in conjunction with the low level of hazard controls identified in Table 4.

If a vehicle or equipment becomes disabled on ice that does not meet the requirements of Table 6, the occupants must be prepared with the necessary emergency kits and supplies, and be ready to abandon the vehicle within two hours. The occupants should have a communications device that enables them to contact the operator of the ice cover so help can be dispatched. Operators must then make arrangements for the workers to be evacuated immediately and for the vehicle to be moved onshore as soon as possible. Until it is moved, the disabled vehicle should be left in the driving lane of an ice cover where the ice thickness is greatest; it should not be parked next to the snowbank where ice thickness and strength is less reliable. Its position should be marked with brightly coloured or reflective pylons.

4.1.6 LANE DIMENSIONS

It is widely known by contractors that removing snow from the ice surface leads to thicker ice compared to areas that remain covered in insulating snow. Consequently, contractors must remove or tamp the snow that is on the ice and build snowbanks along the sides of the road to build a cleared lane width. However, there are two consequences when removing snow and building snow banks: (1) the thicker ice in the cleared lane rises because it is more buoyant and (2) the thinner ice under the snowbanks depresses the ice cover because of the weight of the snow. As shown in Figure 24, this can lead to longitudinal cracks on the ice surface of the upward bending ice in the cleared lane and to cracks on the ice bottom of the downward bending ice underneath the snowbanks. The cleared lane cracks do not tend to be a hazard and can be managed through repairs. However, the cracks underneath the snowbanks can be hazardous if they extend upwards to the surface (Figure 25). These cracks are discussed in more detail in Section 2.3.

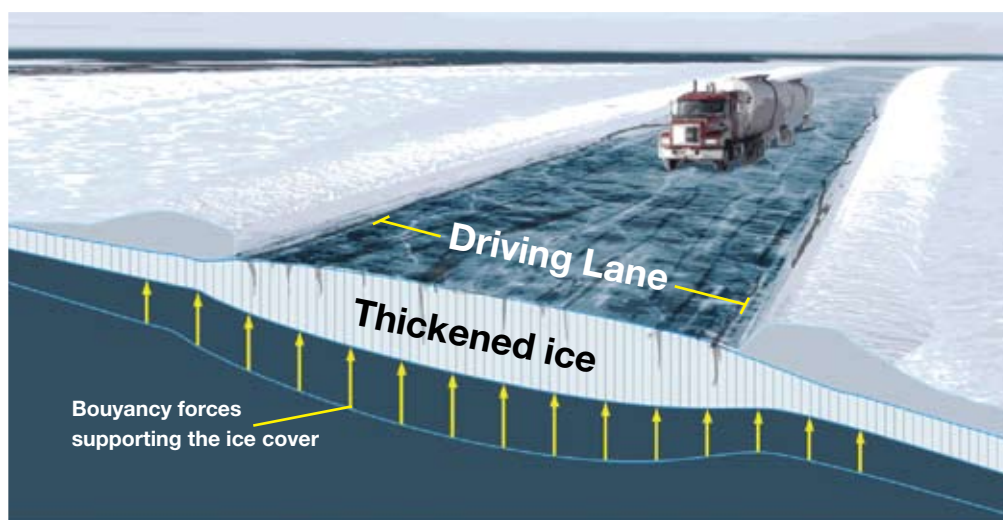


Figure 24
Effect of cleared road
on ice thickness

Figure 25
Grader partially broken through thin ice beneath a snowbank



Table 7 recommends the minimum lane width and maximum snowbank height for a range of vehicle weights. Areas with heavy snowfall should be cleared to a wider extent so that heavy snowbanks are kept away from the driving lanes (Figure 26).

TABLE 7: RECOMMENDED MINIMUM ROAD DIMENSIONS			
Operating Vehicles	Cleared width - bank to bank (m)	Driving lane - width (m)	Max snow bank height (m)
Light vehicle traffic (5,000 kg)	20	10	0.25
Construction (22,500 kg)	25	15	0.50
Super B Train (63,500 kg)	30+	20	1.0

Figure 26
Haul truck on a 40-metre wide lane with low snowbanks




4.1.7 DYNAMIC EFFECTS OF VEHICLE SPEED ON ICE COVERS

When driving on floating ice, a deflection bowl moves with the vehicle, generating waves in the water below the ice. If the speed of these waves is the same as the vehicle speed, the deflection of the ice sheet is magnified and this may overstress the ice cover. The speed at which the maximum magnification of the ice deflection occurs is known as the critical speed. Field studies have shown that vehicles travelling at critical speed increase ice stresses by about 50%, which can lead to extensive cracking, blowouts in thin ice or potential breakthrough.

The critical speed for an ice cover depends on water depth below the ice and ice thickness. For example, for one metre of ice and 15 metres of water, the critical speed is approximately 50 km/h. Therefore, in this example the maximum speed should be set at half that value, 25 km/h. In shallower water, the critical speed is less.

Consequently, it is important to control vehicle speeds to reduce the chance of travelling at critical speed and cracking the ice cover. Speed limits need to be set to prevent overstressing. Speed limits depend on water depth, length of the ice crossing, hazard controls and project requirements.

Speed limits and vehicle spacing are discussed further in Section 5.2.

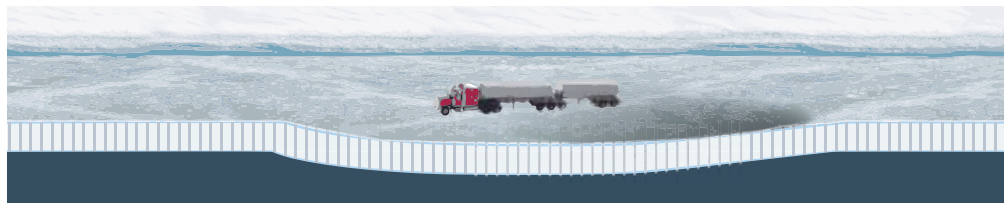

A slow moving vehicle causes the ice to bend and forms a deflection bowl under the vehicle



A fast moving vehicle causes the ice to bend and creates dynamic waves in the ice ahead and behind the vehicle

4.1.8 Other Load Capacity Methods

Other load capacity methods require more advanced field measurements and analysis. For example, the deflection test involves monitoring the deflection of an ice cover as it is gradually loaded, then analyzing the data to calculate the load capacity. Another example, the borehole jack test, provides a field measurement of the strength of the ice cover. Because these methods rely on field measurements of the ice properties, they can provide load capacities for specific vehicle configurations or ice conditions that cannot be accounted for using Gold's Formula.

DYNAMIC WAVES CAUSED BY SPEEDING VEHICLES

- At low speeds, the ice deflection bowl under the vehicle moves with it.
- As speed increases, the water flows away and generates secondary waves in the ice.
- As speed increases, the ice cover stresses and deflections are increased by the waves.
- At critical speed, the full energy of the water waves is trapped under the vehicle.
- At critical speed, the risk of overstressing the ice is higher.
- The vertical deflection of the waves in the illustrations is exaggerated to show the concept.

Figure 27
Dynamic waves

4.2 ICE MONITORING CONTROLS

4.2.1 MEASURING AND RECORDING ICE THICKNESS

Section 195 of the Occupational Health and Safety Code, Working on Ice, indicates that if working on ice when the water beneath the ice is more than one metre deep, the ice must support the load to be placed on it. An ice test must be completed before work begins and periodically during the work to ensure the safety of workers.

Ice thickness is the primary measurement required to determine the safe working load that can be put on the ice (allowable load bearing capacity). Manual measurements are made by cutting a hole in the ice cover with an auger, a saw or an ice chisel and then directly measuring the ice thickness (Figure 28). Measurements are made in a prescribed spacing or pattern to provide sufficient coverage and verify the thickness of the ice cover (Appendix A).



Figure 28
An auger being used to drill a hole through the ice cover

It is imperative that a systematic procedure be implemented to document all ice thickness measurements. Measurement locations should be taken either with a Global Positioning System (GPS) receiver or marked with stakes, or other reliable system (Figure 30) so that these locations can be tracked in future measurements or identified for repairs. This information is a key element in the monitoring control plan. These records are vital to reconcile any ice failures that may occur.

Over the past 20 years, Ground Penetrating Radar (GPR) ice profiling has become a more common method, providing a continuous, non-destructive measurement of ice thickness over large areas or distances. GPR profiling can be combined with GPS to retrieve the data (Figure 29). GPR ice profiling should be carried out by trained personnel and the results reviewed by qualified professionals.

Figure 29
Dual channel GPR ice profiling equipment (being pulled behind a snowmobile) measuring ice thickness and water depth in a single pass



Figure 30
Marked pine trees cut and placed as reference markers along an ice road.



Pre-Construction Ice Thickness Measurements

An ice cover hazard assessment must be conducted and reviewed by field personnel before starting any ice thickness measurement. Suitable equipment and personal protective equipment (PPE) must be prescribed for the work.

Initial testing should be conducted by at least two trained crew members travelling separately over the ice. The work could be carried out by travelling:

- On foot (see Appendix A).
- By snowmobile.
- By amphibious vehicle.

The safe ice thickness limits for fully loaded vehicles must be known and followed at all times. During pre-construction ice measurements, calculate the minimum ice thickness required for fully loaded vehicles being used during pre-construction, using a conservative value of $A=4$ in Gold's Formula for initial use of the ice cover.

Ice thickness can be measured using either the manual method or GPR method. Amphibious vehicles such as the Swedish Hagglund have been used to transport personnel on the ice during initial measurements. Light snow machines can be used (in pairs) as long as the ice is checked ahead of them to verify that it is thick enough for safe operation.

Some projects, such as hydrotechnical measurements or water sampling, involve working on foot on thin, floating ice. A hazard assessment must be undertaken, and special training, PPE and safety protocols are required for such work. For example, working on river ice near open water requires water and ice safety training and PPE that take into account the higher risk of breakthrough and immersion. Procedures for measuring ice thickness before construction should also include the following:

- Testing should be representative of snow and non-snow covered areas.
- While testing, the crew should also be checking the ice for cracks and noting the snow load.
- If vehicles are used, two separate vehicles must be used at all times and must be separated at a safe distance unless ice conditions are known.
- Wheeled vehicles should be equipped with a winch.
- All vehicles must have two-way radios and/or satellite phones, and survival supplies.
- An agreed on call-in procedure must be followed with a safety contact in the base office.
- High visibility (orange or red) survival/flotation suits and other required PPE must be worn at all times (preferable to Personal Flotation Devices/PFDs).
- The route should be recorded on a map or with GPS coordinates; if others will follow the tested route, it should be marked so it is easily identified. Use items such as high visibility stakes or pylons, or flagging tape.
- Vehicles must be fully fuelled at the start of the profiling day and must carry enough fuel for a full day's work with a 50% reserve.
- A Standard Operating Procedure should be prepared to document these requirements.

Construction Ice Profiling

Periodic ice thickness measurements should be conducted as the ice grows, to monitor its progress and approve the use of heavier vehicles. Ice thickness measurements can be carried out using either manual or GPR methods. The choice of a profiling vehicle depends on the minimum ice thickness required for the given vehicle weight. The contractor should consider the following when carrying out ice profiling:

- Calculate the required ice thickness limits for fully loaded vehicles (maximum of 22,500 kg) using $A=5$ in Gold's Formula for initial use of the road by vehicles travelling over the minimum ice thickness.
- Follow safe operating speed guidelines (refer to Table 8).
- Mark approved or tested lanes.
- Communicate with other personnel who have tested, travelled or worked on the ice (check prior to starting work).
- Establish a procedure for the field crew to call in to their supervisor.
- Outfit all vehicles with appropriate safety equipment (Appendix C) and fuel for a full day's work.
- Document these steps by preparing a Standard Operating Procedure.

Operational Ice Profiling

Ice profiling should continue for quality assurance purposes after the ice cover is opened to traffic or for other purposes. The ice cover would normally be open to vehicles used for patrol and reconnaissance such as heavy-duty pickup trucks. Ice covers used as work platforms and recreationally may be serviced by snow-clearing and ice-flooding vehicles. The purpose of operational ice profiling is to confirm operational load limits over time and to allow those limits to safely increase with ice growth.

For more information on Ice measurements and Ice profiling see Appendix A, in particular, Table A1: Recommended maximum spacing of auger test holes for measuring ice thickness, Table A2: Recommended minimum frequency of auger test hole measurements and Table A3: Ice cover profile template. See Appendix B, Guide for GPR Ice Profiling and see Table E1: Ice cover inspection template.

4.2.2 MONITORING ICE CRACKS

Surface cracks should be checked by noting their appearance, determining if they are wet or dry, and assessing their width and depth. The process for assessing ice cracks is shown in the flowchart below.

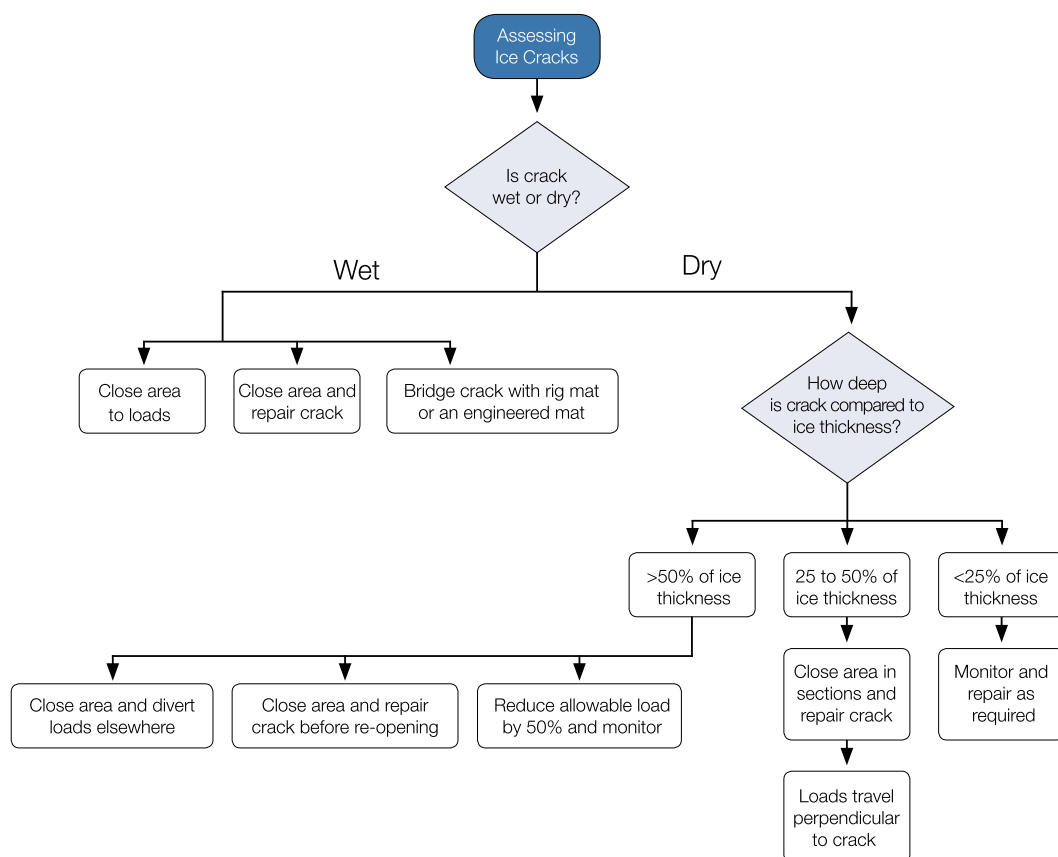


Figure 31
Assessing ice cracks

The water in wet cracks indicates that the cracks reach the bottom of the ice cover. Wet cracks that extend over the ice cover for several metres reduce the bearing capacity of ice. Theoretical studies show that the presence of one wet crack reduces the bearing capacity of the ice by 50% (Ashton 1986). Areas with wet cracks should be flagged off and workers kept away from them. These areas should also be repaired, bridged or closed off completely to people and equipment/vehicles.

Dry cracks show that they do not penetrate the ice sheet and are not an immediate problem. Dry cracks that extend more than 50% of the ice thickness should be repaired immediately or avoided. Dry cracks may be hard to detect when covered by snow and this is another reason to keep the ice cover clear of snow.

4.3 MAINTENANCE CONTROLS

Repairs and maintenance should be undertaken to address cracks, thin zones or other damaged areas that may compromise the load bearing capacity of the ice cover. Snow clearing may also be required to keep the surface clear and to promote natural ice growth. Some ice conditions may require temporary closure of the ice cover to equipment/vehicles, as indicated in Section 5.3.

All cracks that extend more than 50% of the ice thickness should be repaired or traffic diverted around them. Major cracks that have been repaired should be checked once they have re-frozen. Rig mats can be used to bridge cracks that will not heal (re-freeze) or that have a change in elevation that prevents vehicles from crossing. Detours may need to be built around severely cracked areas.



Figure 32
Flooding crew repairing
an ice road

SECTION 5: DEVELOPING YOUR ICE SAFETY PLAN

5.1 ICE SAFETY PLAN

When working on ice covers, there is always a risk of ice failure and breakthrough that can result in potentially fatal consequences. As indicated in the *Occupational Health and Safety Code*, Part 2, Hazard Assessment Elimination and Control, employers and workers involved at a work site must conduct a hazard assessment. An Ice Safety Plan may be required.

The following sections and the appendices provide information to control ice cover hazards based on a project's specific needs: Section 3 – Ice Cover Hazard Controls; Section 4.1 – Design Controls; Section 4.2 – Ice Monitoring Controls; Section 5 – Developing your Ice Safety Plan and Section 5.4 – Emergency Response Planning.

The Ice Safety Plan must be documented and effectively communicated to all employees affected by the ice cover hazards. The following flow chart provides guidance on how to develop an Ice Safety Plan and effectively communicate it to workers.

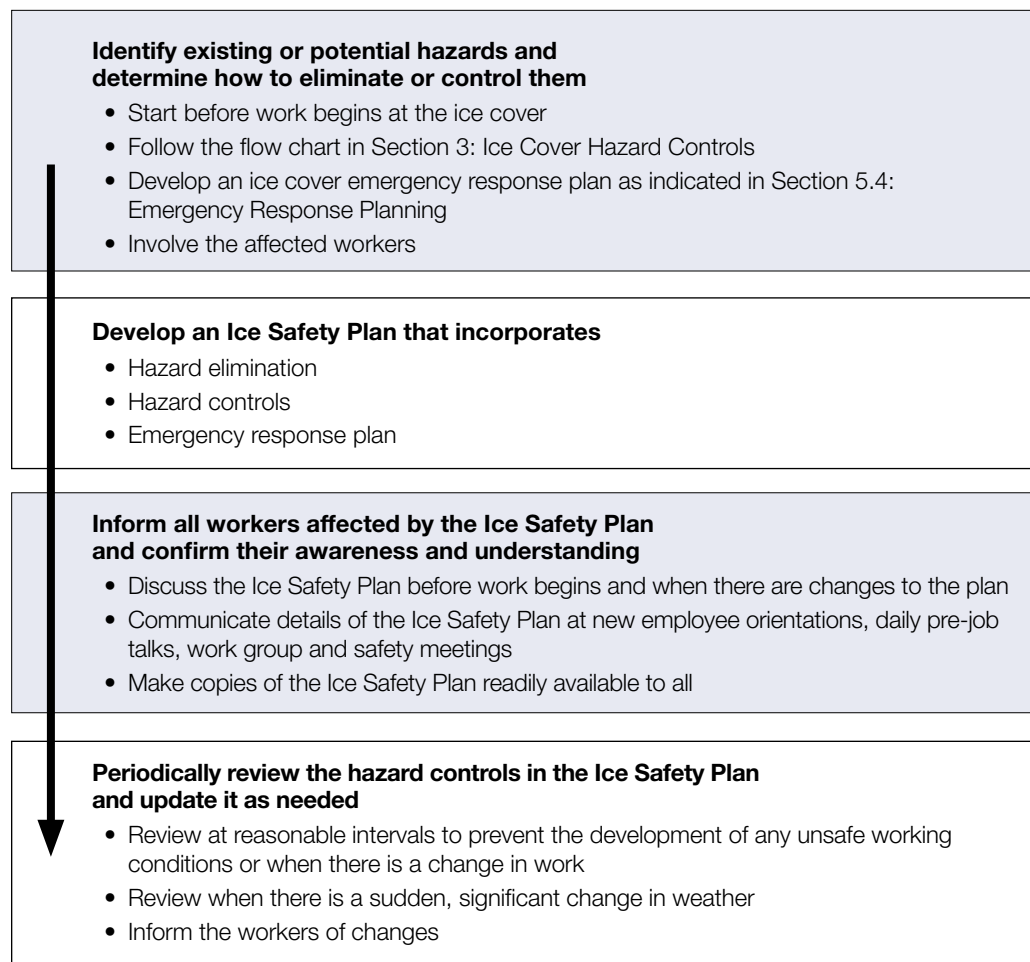


Figure 33

Develop an Ice Safety Plan and communicate it to workers

5.2 STANDARD OPERATING PROCEDURES FOR ICE COVERS

Standard Operating Procedures are an effective means of controlling hazards through administrative controls. The most important operating procedures pertaining to ice covers are discussed below.

5.2.1 APPROVED USE OF ICE COVERS

Traffic should be restricted to vehicles with a Gross Vehicle Weight that meets the requirements for bearing capacity of the current ice conditions. Furthermore, traffic should be restricted to ice covers that have been monitored and ice conditions that have been assessed, documented and approved by the owner (or their designate).

Approved traffic areas should be identified with markers such as barricades, pylons and signage.



Figure 34
Barricade markers

5.2.2 VERIFYING VEHICLE AND EQUIPMENT WEIGHTS

The Gross Vehicle Weight and the minimum ice thickness should be determined before deploying any vehicle or equipment on the ice cover. If necessary, the vehicle or equipment should be weighed with all of the components, fuel, tools and gear that will be included with it. This information should be affixed to the vehicle or equipment where the operator can read it to make sure it is safe to go on the ice.



Figure 35
Portable vehicle scale

5.2.3 STATIONARY LOADS ON ICE COVERS

Parked vehicles and equipment should be spaced no closer than two vehicle and equipment lengths for durations less than two hours. Parking for more than two hours on the ice cover should be prohibited unless the construction of the ice cover meets the requirements in Section 4.1.5. Otherwise, arrangements should be made to move disabled vehicles off the ice cover as soon as possible.

5.2.4 MINIMUM DISTANCES BETWEEN VEHICLES AND EQUIPMENT

For light vehicles (up to 5,000 kg) the distance between vehicles should be at least 200 times the thickness of the ice. For heavier vehicles (greater than 5,000 kg and up to 63,500 kg) the distance should be increased to 500 times the ice thickness. If the water body is smaller than these limits, then only one vehicle or piece of equipment must be permitted on the ice cover at a time. A loaded vehicle should never overtake and pass a moving loaded vehicle going in the same direction.



Figure 36
Sign that limits travel on the ice bridge to one vehicle at a time

5.2.5 MAXIMUM SPEED WHEN TRAVELLING ON ICE COVER

The maximum speed for loaded vehicles travelling across ice covers is 25 km/h for ideal ice and driving conditions. The speed limit when approaching shore lines is 10 km/h. Speed limits should be adjusted to local conditions by considering weather conditions, ice quality, vehicle loads, proximity of vehicles and the hazard controls in place. Speed limits must be posted and may be lowered depending on ice conditions and vehicle loads.

Gold (1971) states: “The observations showed that vehicle speed was a factor for some of the failures. Particular caution must be exercised when approaching shore, or travelling close to it, because of more severe stressing of the cover due to reflections of the hydrodynamic wave. Vehicle speeds should always be strictly controlled when operating on ice.”

TABLE 8: SUGGESTED MAXIMUM SPEED LIMITS	
Vehicle/Ice Conditions	Suggested Maximum Speed Limit (km/h)*
Vehicle profiling during construction	10
Vehicle approaching shore line	10
Vehicle passing flood crews	10
Load vehicles travelling in opposite directions	10
Meeting oncoming vehicles	10
Vehicle operating at the minimum ice thickness for its weight	25
Vehicle operating at ice conditions that are two times the minimum ice thickness for its weight	35

***Speed limits higher than these should be approved by a professional engineer.**
Heavily loaded vehicles should never pass each other.

5.3 ICE COVER CLOSURE

It may be necessary to temporarily close ice covers due to inclement weather, poor surface conditions or poor ice conditions. Inclement weather such as blizzards, whiteouts or fog, poses risks associated with visibility when travelling. Poor surface conditions due to snow drifting and natural water overflow areas also pose risks to users. Poor ice conditions associated with changes in water level, erosion of ice, extensive cracking or excessive wear due to use can increase the risk of breakthrough failure. Owners should suspend ice cover operations until these hazards can be eliminated or controlled.

Normally, ice covers are closed before spring thaw begins and the ice cover begins to decay. Decay of ice covers is affected mainly by solar radiation and by the reflecting properties of the ice surface. For example, ice decays more rapidly when its surface is bare and/or exposed to long hours of sunshine. Ice growth stops and ice decay starts before air temperatures rise above the melting point of the ice. Ice temperature and ice quality should be monitored regularly during spring thaw to determine if the ice cover has adequate bearing capacity to support ice operations.



Figure 37
Road closure sign

5.4 EMERGENCY RESPONSE PLANNING

All work sites must have an Emergency Response Plan that complies with the *Occupational Health and Safety Code* (OHS), Part 7, Emergency Preparedness and Response, and it must include the following components:

- Identification of potential emergencies.
- Procedures for dealing with the emergencies.
- Procedures for rescue and evacuation.
- Identification of emergency responders and evacuation workers.
- Identification, location and operational procedures for emergency equipment and PPE for rescue and evacuation workers.
- Emergency communication requirements.
- First aid requirements that comply with the OHS Code, Part 11, First Aid.
- Emergency response training requirements.

The Emergency Response Plan should be reviewed, tested and updated on a regular basis.



Figure 38
Emergency rescue drill

5.5 EMERGENCY PROCEDURES

Appendix D provides generic emergency procedures to use in the event of an incident that affects the health and safety of workers. Site-specific procedures may override these recommendations.

After the scene of an on-ice incident is deemed safe, rescue the victim and ensure that he or she receives the best available first aid treatment on site. Prepare the victim for transport. Determine the appropriate method of transport given the severity of the injury and access to the work site. Once the victim is transported, cordon off the area and post a sign or beacon at the site to warn others of the potential hazard.

SECTION 6: PERSONAL PROTECTIVE EQUIPMENT

Ice Safety Plans must also address the requirements related to Personal Protection Equipment (PPE) as follows:

1. Clearly identify the PPE required.
2. Provide training on the inspection, use and limitations of PPE.
3. Monitor the condition and use of PPE.

A flotation suit should be worn by workers during the pre-construction and construction phases of preparing a floating ice cover. Flotation suits should also be worn by workers working in situations where the thickness and quality of the ice cover is unknown or questionable, for example, when workers are taking water samples at the edge of open water on a flowing river. The type of flotation suit needed will vary based on the conditions of use and the features required in order to perform work safely. Flotation suits help prevent hypothermia by providing a barrier against cold water and offer buoyancy much like a life jacket. Both of these features may extend the survival time of a person who has fallen into frigid water.

7.0 REFERENCES

7.1 GOVERNMENT REFERENCES

Alberta Employment and Immigration 2005. Due diligence. Workplace Health and Safety Bulletin, LI015.

Commission de la santé et de la sécurité du travail du Québec 1996. Travaux sur les champs de glace. Bibliothèque nationale du Québec.

Department of Transportation 2007. A field guide to ice construction safety. Government of the Northwest Territories.

Manitoba Transportation and Government Services 2005. Inspector's manual for the construction and maintenance of winter roads, 7th edition.

Safe Operating Procedures for Winter Roads Committee 2007. Winter roads handbook. Saskatchewan Ministry of Highways and Infrastructure.

Winter Road Safety Committee 2005. Contractor's manual for the construction and maintenance of winter roads, 5th edition. Manitoba Transportation and Government Services.

7.2 TECHNICAL REFERENCES

Ashton, G.D. 1985. Deterioration of floating ice covers. ASME Journal of Energy Resources Technology, 107: 177-182.

Ashton, G.D. 1986. River and lake ice engineering. Water Resources Publications, Littleton, Colorado.

Canadian Red Cross Society 2006. Drownings and other water-related injuries in Canada, 1991-2000—Module 2: Ice & Cold Water. The Canadian Red Cross Society.

Gold, L.W. 1971. The use of ice covers for transportation. Canadian Geotechnical Journal 8: 170-181.

Hayley, D.W., and Proskin, S.A. 2008. Managing the safety of ice covers used for transportation in an environment of climate warming. Presentation to the 4th Canadian Conference on Geohazards, Quebec.

Lock, G.S.H. 1990. The growth and decay of ice. Cambridge University Press, Cambridge, UK.

MacFarlane, I.C. (ed.). 1969. Muskeg engineering handbook. University of Toronto Press.

Pounder, E.R. 1965. The physics of ice. Pergamon Press, Oxford.

Giesbrecht G, Hamlet M, Hubbell F. 2004. Frozen Mythbusters. Wilderness Medicine Newsletter – Principles and Practices of Extended Care and Rescue. Vol. 15, No. 6. www.lifesaving.com/files/Mythbusters_sm.pdf, accessed September 15, 2009

7.3 MISCELLANEOUS REFERENCES

Iglauer, Edith 1975. Denison's Ice Road. E.P. Dutton & Co, Inc., New York.

Marston, D.L. 1985. Law for Professional Engineers, 2nd Edition. McGraw-Hill Ryerson Ltd., Toronto.

Sigfusson, Svein. 1992. Sigfusson's Roads. Watson and Dwyer Publishing Ltd., Winnipeg, Canada.

History Television. Ice Road Truckers. 2009. www.history.com/content/iceroadtruckers-season-three

7.4 PHOTO AND ILLUSTRATION CREDITS

Kevin Kelly Illustrations

EBA Engineering Consultants Ltd.

Tibbitt to Contwoyto Winter Road Joint Venture

Nuna Logistics

BHP Billiton

Rescue Canada

University of Alberta

Girard Enterprises

Municipality of Wood Buffalo

Shell Canada Energy

ATCO Electric

Alberta Employment and Immigration

APPENDIX A

USING AN AUGER TO MEASURE ICE THICKNESS WHILE ON FOOT

Field crew members must walk in pairs when carrying out pre-construction manual ice profiling. Both members should wear flotation suits and remain at least 10 metres apart. Both members should be trained in rescue and self-rescue techniques and be equipped with appropriate equipment.

An ice auger should be used. Alternately, an ice chisel or axe may be used to test ice up to 30 centimeters thick. Over unknown water or known moving water (that is, river, area of springs, etc.), the lead crew member should check for thickness in accordance with Table A1. Measurements should be taken using an ice thickness measuring stick, which has a foot to hook the underside of the ice cover. This allows for an accurate measurement of the ice cover and reduces visibility problems caused by poor lighting. The distance may be increased over known calm water and decreased for known currents or eddies. If the distance between test locations is increased, then the trailing crew member must trail further back and remain behind the previous satisfactory test hole. The locations of the test hole measurements should be recorded on a map and/or with GPS coordinates.

On lakes, the distance between test holes may be substantially increased with the trailing crew member remaining well behind. Extra caution needs to be exercised along shore, as the floating ice cover may actually be thinner near the shore. In addition, as progress is made across the lake, sampling distances will need to be shortened as the ice thickness begins to decrease. If any sample reveals clear blue ice less than 10 centimeters thick, the crew members are to leave the area immediately.

Using the above procedures, test crew members should establish a boundary for the project area. Ice thickness measurements should be taken at locations throughout the area, and the thinnest measurement of ice cover should be used as the measurement for all bearing and load bearing capacity calculations.

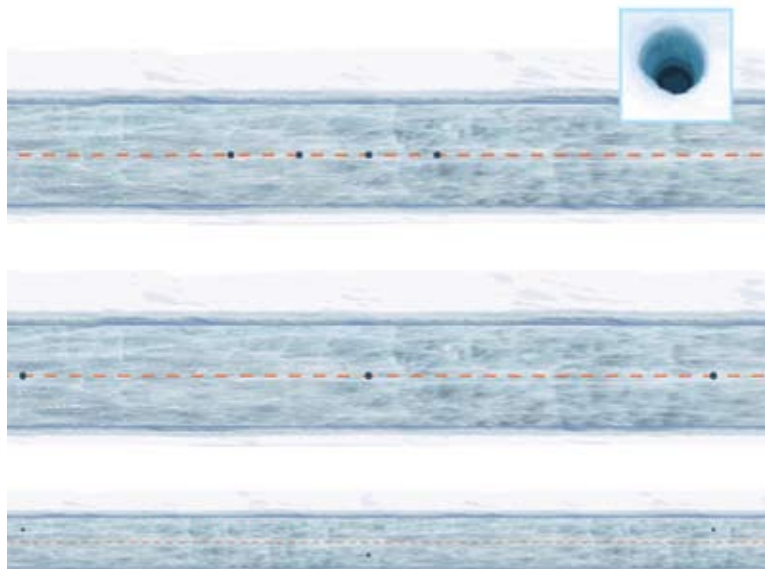


Figure A-1

Example of auger test hole spacing patterns for river ice with slow moving currents.

Pre-construction: 10-metre spacing between auger test holes along centre line

Construction: 50-metre spacing between auger test holes along road centre line

Operations: 100-metre spacing between auger test holes along alternate sides of the road centre line

GUIDANCE ON SPACING AND FREQUENCY OF AUGER TEST HOLES IN ICE

The number and spacing of manual auger test holes to check ice thickness depend on:

- The type of water body and the variability in ice thickness—river ice or lake ice, proximity to shore and currents.
- The level of prior knowledge of the ice conditions—the number of ice measurements available prior to and during construction, and during operations..

TABLE A1: RECOMMENDED MAXIMUM SPACING OF AUGER TEST HOLES FOR MEASURING ICE THICKNESS

Water Body Type	Pre-construction	Construction	Operations
Rivers – fast moving or high currents	5 m between test holes along centre line or a minimum of 5 holes	25 m between test holes along alternating sides of centre line	50 m between test holes along alternating sides of centre line
Rivers – slow moving and within 250 m of shore	10 m between test holes along centre line	50 m between test holes along centre line Check known thin areas	100 m between test holes along alternating sides of centre line Check known thin areas
Rivers – slow moving and more than 250 m offshore	20 m between test holes along centre line	100 m between test holes along centre line	200 m between test holes along alternating sides of centre line
Lakes – within 250 m of shore	10 m between test holes along centre line	50 m between test holes along alternating sides of centre line Check known thin areas	100 m between test holes along alternating sides of centre line Check known thin areas
Lakes – more than 250 m offshore	20 m between test holes along centre line	100 m between test holes along centre line	200 m between test holes along centre line
These are maximum spacings for ice auger measurements – additional measurements may be required to locate thin areas.			

TABLE A2: RECOMMENDED MINIMUM FREQUENCY OF AUGER TEST HOLE MEASUREMENTS

Pre-Construction	Construction	Operations
Check every 2-3 days to monitor ice growth until minimum ice thickness is achieved to deploy heavier pieces of equipment	Check every 4-7 days or more frequently to monitor for specific ice requirements for construction equipment and operations	Test entire route prior to increasing load limits Monitor thin areas as recommended by ice cover supervisor (e.g., 2-4 days)
More frequent measurements may be required to monitor changes in ice conditions due to environmental effects (warming, currents) or changes in loads (heavier or more frequent loads).		

TABLE A3: ICE COVER PROFILE TEMPLATE

**ALL MEASUREMENTS
TO BE IN CENTIMETRES**

Ice Type

BLUE

(TRANSPARENT
OR CLEAR)

1

WHITE

(SNOW ICE)

2

FRAZIL ICE

(SLUSH)

3

JAM ICE

(THICK PIECES
FROZEN TOGETHER)

4

TEST HOLE NO.	ICE THICKNESS	SNOW THICKNESS	ICE TYPE	WATER DEPTH
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				

ICE COVER PLAN

Date: _____

Location: _____

Scale: _____

A full-page view of a blank sheet of graph paper. The grid consists of small, uniform squares formed by thin gray lines. There are no margins, text, or other markings on the page.

Identify Flow Direction and North direction if applicable

Prepared by: _____

APPENDIX B GUIDE FOR GPR ICE PROFILING

B1 PURPOSE

The objective is to ensure that all Ground Penetrating Radar (GPR) ice profiling data is based on sound geophysical practice and current APEGGA guidelines. This Appendix is intended to define the minimum standards that any radar ice profiling survey must meet in order to comply with this Best Practice.



Figure B1
Dual channel GPR ice profiling equipment (being pulled behind a truck) measuring ice thickness and water depth in a single pass

B2 SCOPE

Ice profiling is used for two scenarios:

- **Scenario 1: Ice Profiling for Construction Purposes.** This type of profiling is used to monitor the ice thickness during construction when the ice surface is cleared to promote natural ice growth or when the ice surface is flooded to accelerate ice growth. The ice profiling information is used as a relative measurement to find thinner areas (in real time) that require improvement.
- **Scenario 2: Ice Profiling for Engineering Purposes.** This type of profiling is used by professional engineers to confirm ice thickness by calculating ice bearing capacity and to provide recommendations for operations. In this scenario, the following considerations should be accounted for:
 - All raw data should be digitally stored.
 - All data should be geo-referenced (GPS).
 - Data review or quality control should be carried out by a qualified professional.
 - GPR should be calibrated against ice auger measurements regularly.

The detailed mechanics of operating the ice profiling equipment and analyzing the field results is beyond the scope of this document.

B3 EQUIPMENT SPECIFICATIONS

B3.1 RADAR SYSTEM

Several different types of radar systems can be used for ice profiling. The antenna frequency typically used is either 400 or 500 MHz.

The following factors should be considered:

- Time window.
- Horizontal resolution.
- GPS capability.

B3.2 SURVEY METHOD

Survey methods will vary depending on site conditions and the equipment being used. Major requirements include:

- Keeping accurate notes.
- Selecting a GPS system that will retrieve real-time geo-referenced data e.g., UTM (Universal Transverse Mercator) coordinates or latitude/longitude.
- Calibrating both the time base and the ice thickness.

B4 PROCESSING, INTERPRETATION AND REPORTING

Little processing should be required with GPR data. The ice auger calibrations are used to determine the ice velocity that is used to convert GPR data into ice thickness.

All ice thickness profiles should have proper geo-referencing to show the locations of the GPR ice measurements. Ice auger calibration data should also be shown on the profiles.

B5 REVIEW REQUIREMENTS

If the ice profiling falls under Scenario 2 (Ice Profiling for Engineering Purposes), the data and ice profiling results should go through a professional review or quality control procedure under the management of a professional geophysicist to verify accuracy and consistency, and to identify issues that need resolving.

C1 SUGGESTED EQUIPMENT TO BE KEPT IN THE VEHICLE

Equipment to be kept in the vehicle should include:

- Thermometer to monitor air temperature.
- First aid kit (checked and fully stocked).
- Fire extinguisher.
- Warning devices (pylons, reflectors, flags, etc.).
- Waterproof matches/lighter and material to start fires.
- Candles.
- Sleeping bag or warm blankets.
- Backup cold weather clothing.
- Metal or ceramic coffee mug.
- Flashlight.
- Snow shovel.
- Two-way radio, cell phone or satellite phone.
- Emergency rations: food (energy bars) and beverage mixes (instant coffee, tea, hot chocolate powder).

Employers should inform workers if their vehicle or equipment is equipped with special safety features that would assist them when working on ice.

C2 SUGGESTED PERSONAL PROTECTIVE EQUIPMENT AND SAFETY EQUIPMENT

Protective clothing and safety equipment should include:

- Axe or ice chisel.
- 30 m (minimum) of 10 mm buoyant polypropylene rescue rope.
- Belt or harness with D rings.
- A flotation suit.
- Ice rescue picks.
- Whistle.
- Warm clothing.
- Insulated gloves (waterproof).
- Rubber-soled felt pack boots.
- Sunglasses.

D1 COLD WATER IMMERSION

Dr. Gordon Giesbrecht, operator of the Laboratory for Exercise and Environmental Medicine at the University of Manitoba, has conducted hundreds of cold water immersion studies that have provided valuable information about cold stress physiology and treatment for hypothermia. Videos produced by the Discovery Channel Canada (2002) provide guidance on cold water immersion and self-rescue if a person falls through the ice. These videos can be found at either Dr. Giesbrecht's website or the Discovery Channel website:

www.umanitoba.ca/faculties/kinrec/grad_programs/about/giesbrecht.html

www.archive.org/search.php?query=subject%3A%22Dr.%20Gordon%20Giesbrecht%22

www.coldwaterbootcamp.com

Note: These downloads are for non-commercial, single-user viewing purposes only. No reproduction is permitted. If you would like to display this material to your group or are interested in purchasing copies of the Discovery Channel Canada Videos (2002), please contact Distribution Access at www.distributionaccess.com.

D2 EMERGENCY SELF-RESCUE



Contrary to popular myth, hypothermia does not occur in five to 10 minutes and it is possible for the person to achieve self-rescue. Dr. Gordon Giesbrecht, a specialist in cold water immersion at the University of Manitoba, summarizes what happens to humans in a cold water immersion situation with the expression “1 minute ... 10 minutes ... 1 hour ... 2 hours”.

One minute to control your breathing

For about one minute, the person will gasp for air in reaction to contact with the cold water. After one minute, the gasping subsides, the skin numbs and the sensation of intense cold decreases.

Ten minutes of meaningful movement

The person has about 10 minutes to get out of the water.



Treading water

Do not panic and thrash about. Resist the urge to gasp, slowly tread water or grasp the edge of the ice to keep your head above the water.



Kick and pull

Keep your hands and arms on the ice and kick your feet. This brings your body to a horizontal position, parallel to the ice surface.



Horizontal kick and pull

Once horizontal, continue to kick your feet while pulling with your hands. Draw yourself up onto the ice.



Roll onto the ice

Keep your weight spread out as you roll, crawl, and slide across the ice until it will support your weight.

One hour before losing consciousness

If the person manages to hang onto the ice or stay afloat after 10 minutes, the muscles in their arms and legs will lose the strength to get them out of the water. Eventually they will lose consciousness as core body temperature decreases to about 30°C. The actual time depends on the clothing worn, energy stores and body build. If arms, beard, or other part of the body is not frozen to the ice, the person will slip below the surface and drown.

Two hours to be found

If the person stays above the surface of the water, rescue is still possible within two hours. At about two hours, death due to hypothermic cardiac arrest will occur when the body's core temperature falls below 28°C.

D3 EMERGENCY AID

When an incident on an ice cover occurs, work in teams to implement the following procedures:

- Stop your work.
- Rescue the victim if safe to do so.
- Administer first aid and CPR as needed.
- Follow procedures to prevent hypothermia (dry clothing, warm blankets, hot liquids).
- Call for help (air or road ambulance).
- Transport to nearest medical facility, if necessary.
- Clear the area/road near the incident site to enable rescue vehicles to reach the victim.
- Cordon off the incident site with brightly coloured or retroreflective pylons to warn others of the potential hazards.

D4 EVACUATION PROCEDURES BY HELICOPTER

For serious incidents that require helicopter evacuations, requests can be made directly to the nearest helicopter company or through the 911 dispatcher (if one is available). If telephone contact cannot be made directly, relay a message using the radio frequencies available on site. Make sure you know what radio frequencies are used or monitored before you get on site. Communication between the ground and helicopter is vital.

When talking with the dispatcher or relaying a message, provide the following information:

- Who is calling.
- Location of incident.
- Latitude and longitude.
- Radio frequency.
- Number of casualties.
- Nature of injury(ies).
- Ambulance personnel required.
- Equipment or supplies that may be needed.

Do not mention the name of the casualty on the radio or phone.

Mark the site/position with brightly coloured or retroreflective pylons. A helicopter requires a level area approximately 30 m wide with a clear approach such as open ground, stable ice cover or a straight section of road. Ensure the landing area is clear of debris, containers, vehicles and equipment. Designate someone to monitor a two-way radio on the specified frequency in order to assist the helicopter in locating the landing site. Prepare the casualty for transport and ensure that the casualty is protected from rotor wash.

D5 EVACUATION PROCEDURES BY VEHICLE

Contact the nearest hospital through the 911 dispatcher (if one is available). If telephone (cell or satellite) contact cannot be made directly, relay a message using the radio frequencies available on site. Provide the dispatcher with information about the type of injuries and the number of people injured. If an ambulance is required, decide on the meeting location, for example, at the scene of the incident or en route to the hospital, and provide the dispatcher with the location (e.g., road system name and distance – latitude and longitude preferred) and any other necessary directions. If transporting the victim directly to the hospital, provide the dispatcher with the estimated time of arrival.

Cordon off the incident site with brightly coloured or retroreflective pylons to warn others of the potential hazards.

D6 INVESTIGATIONS

An emergency evacuation will likely require an investigation under the *Occupational Health and Safety Act* – Section 18.

There are five steps that will need to be followed by the supervisor once any injured personnel have been evacuated.

1. Secure the scene of the incident to control imminent danger (if it hasn't been done already) and prevent disturbance to the scene.
2. Take pictures of the incident site.
3. Notify Government of Alberta – Workplace Health and Safety 1-866-415-8690 to report the time and place the incident occurred and its nature.
4. Investigate the circumstances surrounding the incident.
5. Write a report of your investigation.

APPENDIX E PLANNING FOR ICE COVERS

A number of factors are considered when locating an ice cover: project logistics, project layout, site access, terrain and ground conditions, ice conditions and river/lake hydraulics. Project planning is critical because of the short seasons associated with ice covers.

The following steps should be taken to provide background information for planning and design.

1. Check local knowledge or the previous contractor's experience regarding the historical ice conditions.
2. Check local conditions to determine if there are currents, springs or other factors that may affect the uniformity and development of the ice.
3. Review proposed ice road route and or ice cover location by reviewing air photos or conducting an aerial survey to identify the route or use previously identified routes.
4. Review lake or river conditions.
5. Estimate the natural ice thickness and/or built ice thickness from historical or contractor information.
6. Review proposed vehicles: number, configurations (2 axle, 3 axle), Gross Vehicle Weights (GVW).
7. Estimate the ice thickness required using load weights and the crossing width.
8. Review schedule: desired start and end dates and length of time planned for working during ice season.
9. Determine if natural ice growth will meet the required ice estimated in step 7 in the time frame estimated in step 8.

TABLE E1: ICE COVER INSPECTION TEMPLATE

Date:		Location:			
Completed by:					
Climate Condition: Calm – Snow – Rain – Wind		List Names of Workers Present		3)	
Visibility Factors: Clear – Fog – Light – Dark		1)		4)	
Today's Temperature: _____ 0 Celsius		2)		5)	
Ice Measurement Data		Traffic Control Record	Yes	No	If No a corrective action is required
Hole Distances Are Measured		AB Environment River Forecast			
From the east/north to west/ south shore		Roadway is ___ m - ___ m width			
Test Hole #	Ice Depth	Traffic Signs In Correct Position			
#1-	cm	Traffic Signs Clean/Visible			
#2-	cm	Barricades In Correct Position			
#3-	cm	Test Holes—Staked & Numbered			
#4-	cm	Ice Surface Clear of Snow			
#5-	cm	Ice-Road Surface Visible			
#6-	cm	Vehicles Cross @ Safe Speeds			
#7-	cm	Vehicles Exceeding Load Ratings			
#8-	cm	Unusual or Deep Cracks Starting			
#9-	cm	Water Visible In Cracks			
#10-	cm	Thin Ice On/Near Roadway			
#11-	cm	Are Approach Ramps Sanded			
#12-	cm	Sand/Salt Accumulating on Road			
#13-	cm	Flooding Road Top Required			
#14-	cm	Shore Inspection: Water On Surface—Shore Ice Lifting or Bulging—Shore Ice Falling or Dropping—Shore Ice Bulging/Breaking Up Stream—Water On Surface Up Stream			
#15-	cm				
#16-	cm	Ice Road Capacity Data (As per Alberta Ice Safety Best Practice...)			
#17-	cm	Yesterday's Load Capacity Rating: _____ KG			
#18-	cm				
#19-	cm	Today's Load Capacity Rating: _____ KG			
#20-	cm				
#21-	cm	List Potential Problems Developing On Ice Road Or Up Stream:			
#22-	cm				
#23-	cm				
#24-	cm				
#25-	cm	List Name (s) of Persons Notified	List Time Of Notification		
#26-	cm	1) Project Manager	am/pm		
#27-	cm	2) Superintendent	am/pm		
#28-	cm	3) Supervisor	am/pm		
#29-	cm	4) AMA—Ice Road Load Capacity Changes	am/pm		
#30-	cm	5)	am/pm		